



Let's Tune The Music!



PRODUCT CATALOGUE

Dear Friends

Brand DJPLUS was established in Delhi, INDIA in 2004. Now shifted to modern and well equipped factory in Tronica City, Ghaziabad, Uttar Pradesh. We are Specialized in manufacturing of Public Address Systems and DJ Systems. We have 30 years experience in Professional Audio Industry .

DJPLUS is famous in sound industry for its highly credible quality and a most reasonable price. It aims at “better quality, lower price” ideology to provide the best products and service.

Our Main Products Cover PA Amplifier, Power Amplifiers, Audio Mixers, Microphones, Wireless Microphones, Driver Units, Ceiling Speaker, Column Speakers, High Frequency Drivers, high quality professional loudspeakers, Speaker Systems, Portable PA systems, Teaching Amplifiers, Musical Instruments Amplifiers, USB Mp3 Players, Active and Passive Crossovers, Effect Units, Audio Connectors, Audio Cables and Accessories.

We own a very good workshop and working environment, moreover, we have a team of excellent staffs and technicians who have rich experience in this line and have a great capability of researching and manufacturing.

Our mission: satisfying customer's needs, organizational and production flexibility, continuous aim towards research and innovation. To achieve this difficult target, we are constantly challenging ourselves.

As DJPLUS Team, we are proud to make our contribution in raising your product performances to a higher level!

Team DJPLUS

DJ+PLUS[®]
PROFESSIONAL

Lets Tune the music !

SM
Studioman[®]



01	PROFESSIONAL DJ & PA AMPLIFIERS	05
02	PROFESSIONAL AUDIO MIXERS & EFFECT UNITS	20
03	PROFESSIONAL DYNAMIC MICROPHONES	29
04	PROFESSIONAL MEETING MICROPHONES	31
05	PROFESSIONAL WIRELESS MICROPHONES	33
06	DRIVER UNITS & DIAPHRAGMS	37
07	INSTALLATION - MUSIC HORN / CEILING /WALL/COLUMN	38
08	CLASS-D AMPLIFIER WITH BLUETOOTH	42
09	PA PORTABLES & GUITAR AMPLIFIERS	45
10	POWERED PA SPEAKER SYSTEMS	47
11	PROFESSIONAL SPEAKERS & WOOFERS	49
12	DJ & PA SPEAKER SYSTEMS	58
13	HF COMPRESSION DRIVER & TWEETERS	63
14	CROSSOVER NETWORKS	65
15	SERVO VOLTAGE STABILIZERS	70
16	STUDIOMAN & MASTERAMP PROFESSIONAL POWER AMLIFIER	72
17	ACCESSORIES	77

PROFESSIONAL POWER AMPLIFIER




Specifications

HDA-9000 | HDA-10000

Power (Stereo Mode both channel driver)		
2 ohms power*	2 X 6000W	2 X 6500W
4 ohms power*	2 X 4000W	2 X 4500W
8 ohms power*	2 X 2000W	2 X 2500W
Power (Bridge Mono Mode)		
8 ohms power*	4500W	5000W
4 ohms power*	9000W	10000W
Frequency Response (8 ohm)	20Hz~20KHz, -0.5dB (+/-0.5dB)	
Other specifications		
Damping Factor (8 Ohm 1K)	1500:1	1500:1
Slew Rate	>90v/us	>90v/us
Input Sensitivity	0.775V/1.0V/1.4V	
Output topology	Class H	
Cooling	4 FAN COOLING	
Power Supply	220-240v/45-55Hz	
Weight (Kg)		
Weight (Gross)	46Kg	53Kg

PROFESSIONAL DJ & PA AMPLIFIER



MADE WITH HI-TECH
TOROIDAL TRANSFORMER



TOP HANDLE
(EASY TO CARRY)

SPECIFICATIONS

POWER OUTPUT

DZA-12000M

800W + 800W Max.,
600W + 600W at 10%THD

INPUT

Mono 2 x 200mV/100kΩ
Stereo L/R 200mV/100kΩ
Line L/R 1V/50kΩ

TONE CONTROLS

Bass ± 10dB AT 100Hz
Treble ± 10dB AT 10kHz

OUTPUTS

Line 1v/1kΩ

SPEAKER OUTPUTS

2Ω, 4Ω, 8Ω, 70V & 100V for each zone

POWER SUPPLY

AC: 220-240V 50/60Hz
DC: 36V (3 X 12V Car Battery)

PROFESSIONAL DJ & PA AMPLIFIER




DPA-10000M




DPA-10000B

SPECIFICATIONS	DPA-10000M	DPA-10000B
POWER OUTPUT	1400W Max. / 1000W RMS at 10% THD	1400W Max. / 1000W RMS at 10% THD
INPUT	8 X Mic 0.8mV/4.7kΩ 3 X Aux 100mV/50kΩ 1 X Aux 250mV/50kΩ 1 X Line 1V/50kΩ	1 X Line 200mV/100kΩ 1 X Line 1V/50kΩ 1 X 200mV Input
TONE CONTROLS	Bass ± 10dB AT 100Hz Treble ± 10dB AT 10kHz	Bass ± 10dB AT 100Hz Treble ± 10dB AT 10kHz
OUTPUTS	Preamp 200mV/600Ω, Line 1v/1kΩ	Line 1v/1kΩ
SPEAKER OUTPUTS	1Ω, 2Ω, 4Ω, 70V & 100V	1Ω, 2Ω, 4Ω, 70V & 100V
POWER SUPPLY	AC: 220-240V 50/60Hz DC: 48V (4 X 12V Car Battery)	AC: 220-240V 50/60Hz DC: 48V (4 X 12V Car Battery)



MADE WITH HI-TECH
TOROIDAL TRANSFORMER

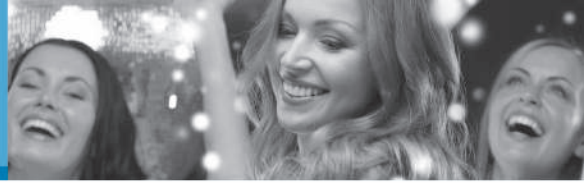

DJ-10000



DZA-10000M

SPECIFICATIONS	DJ-10000	DZA-10000M
POWER OUTPUT	1000W Max. / 800W RMS at 10% THD	600W+600W Max. / 500W+500W RMS at 10% THD Each Zone
INPUT	1 X Line 200mV/100kΩ 1 X Line 1V/50kΩ	Line 200mV/100kΩ Each Zone Line 1V/50kΩ Each Zone
TONE CONTROLS	Bass ± 14dB AT 100Hz Mid ± 7dB AT 1kHz Treble ± 14dB AT 10kHz	Bass ± 10dB AT 100Hz Treble ± 10dB AT 10kHz
OUTPUTS	Line 1v/1kΩ	Line 1v/1kΩ
SPEAKER OUTPUTS	1Ω, 2Ω, 70V & 100V	2Ω, 4Ω, 8Ω, 70V & 100V
POWER SUPPLY	AC: 220-240V 50/60Hz	AC: 220-240V 50/60Hz



TOP HANDLE
(EASY TO CARRY)

PROFESSIONAL DJ AMPLIFIER




DJ-15000



DJ-12000

SPECIFICATIONS	DJ-15000	DJ-12000
POWER OUTPUT	1700W Max./1500W RMS at 10% THD	1400W Max./1200W RMS at 10% THD
INPUT	1 X Line 200mV/100k Ω 1 X Line 1V/50k Ω	1 X Mic 1.5mV/4.7K Ω 1 X Aux 220mV/470k Ω , 1 X Line 1V/10k Ω
TONE CONTROLS	Bass $\pm$ 14dB AT 100Hz Mid $\pm$ 7dB AT 1kHz Treble $\pm$ 14dB AT 10kHz	Bass $\pm$ 14dB AT 100Hz Mid $\pm$ 7dB AT 1kHz Treble $\pm$ 14dB AT 10kHz
OUTPUTS	Line 1v/1k Ω	Line 1v/1k Ω
SPEAKER OUTPUTS	2 Ω ,4 Ω ,70V&100V	2 Ω ,4 Ω ,70V&100V
POWER SUPPLY	AC: 220-240V 50/60/Hz	AC: 220-240V 50/60/Hz



MADE WITH HI-TECH
TOROIDAL TRANSFORMER
(DJ-15000)



DJ-801



DJ-601

SPECIFICATIONS	DJ-801	DJ-601
POWER OUTPUT	1000W Max./800W RMS at 10% THD	800W Max. / 600W RMS at 10% THD
INPUT	1 X Mic 1.5mV/4.7K Ω 1 X Aux 220mV/470k Ω , 1 X Line 1V/10k Ω	1 X Mic 0.8mV/4.7K Ω 1 X Aux 100mV/470k Ω , 1 X Line 1V/10k Ω
TONE CONTROLS	Bass $\pm$ 14dB AT 100Hz Mid $\pm$ 7dB AT 1kHz Treble $\pm$ 14dB AT 10kHz	Bass $\pm$ 14dB AT 100Hz Mid $\pm$ 7dB AT 1kHz Treble $\pm$ 14dB AT 10kHz
OUTPUTS	Line 1v/1k Ω	Line 1v/1k Ω
SPEAKER OUTPUTS	2 Ω , 4 Ω , 70V & 100V	2 Ω , 4 Ω , 70V & 100V
POWER SUPPLY	AC: 220-240V 50/60/Hz	AC: 220-240V 50/60Hz



TOP HANDLE
(EASY TO CARRY)

PROFESSIONAL DJ & PA AMPLIFIER



SPECIFICATIONS

DPA-6000M

POWER OUTPUT	800W Max. / 600W RMS at 10% THD
INPUT	7 X Mic 0.8mV/4.7kΩ 2 X Aux 100mV/470kΩ 1 X Line 1V/50kΩ
TONE CONTROLS	Bass ± 10dB AT 100Hz Treble ± 10dB AT 10kHz
OUTPUTS	Preamp 200mV/600Ω, Line 1v/1kΩ
SPEAKER OUTPUTS	2Ω, 4Ω, 8Ω, 70V & 100V
POWER SUPPLY	AC: 220-240V 50/60Hz DC: 36V (3 X 12V Car Battery)

SPECIFICATIONS

DPA-6000B

POWER OUTPUT	800W Max. / 600W RMS at 10% THD
INPUT	1 X Line 200mV/100kΩ 1 X Line 1V/50kΩ
TONE CONTROLS	Bass ± 10dB AT 100Hz Mid ± 10dB AT 1kHz Treble ± 10dB AT 10kHz
OUTPUTS	Preamp 200mV/600Ω, Line 1v/1kΩ
SPEAKER OUTPUTS	2Ω, 4Ω, 8Ω, 70V & 100V
POWER SUPPLY	AC: 220-240V 50/60Hz DC: 36V (3 X 12V Car Battery)



SPECIFICATIONS

TZA-5000EM

POWER OUTPUT	300W + 300W Max. / 250W + 250W RMS at 10% THD
INPUT	6 X Mic 0.65mV/4.7kΩ 2 X Aux 100mV/470kΩ Stereo L/R 200mV/100kΩ Line LR 1V/50kΩ
TONE CONTROLS	Bass ± 10dB AT 100Hz Treble ± 10dB AT 10kHz
OUTPUTS	Preamp 200mV/600Ω Line 1V/1kΩ
SPEAKER OUTPUTS	2Ω, 4Ω, 8Ω, 70V & 100V
POWER SUPPLY	AC: 220-240V 50/60Hz DC: 24V (2 X 12V Car Battery)



SPECIFICATIONS

DPA-350E

POWER OUTPUT	450W Max. / 350W RMS at 10% THD
INPUT	7 X Mic 0.8mV/4.7kΩ 2 X Aux 100mV/470kΩ, 1 X Line 1V/50kΩ
TONE CONTROLS	Bass ± 10dB AT 100Hz Treble ± 10dB AT 10kHz
OUTPUTS	Preamp 200mV/600Ω Line 1V/1kΩ
EFFECT	ECHO, REPEAT, DELAY
SPEAKER OUTPUTS	2Ω, 4Ω, 8Ω, 70V & 100V
POWER SUPPLY	AC: 220-240V 50/60Hz DC: 36V (3 X 12V Car Battery)





SPECIFICATIONS

POWER OUTPUT	300W Max. / 250W RMS at 10% THD
INPUT	6 X Mic 0.65mV/4.7KΩ 2 X Aux 100mV/470kΩ, 1 X Line 1V/50kΩ
TONE CONTROLS	Bass ± 10dB AT 100Hz Treble ± 10dB AT 10kHz
OUTPUTS	Preamp 200mV/600Ω, Line 1V/1kΩ
SPEAKER OUTPUTS	2Ω, 4Ω, 8Ω, 70V & 100V
POWER SUPPLY	AC: 220-240V 50/60Hz DC: 24V (2 X 12V Car Battery)

DPA-250M

SPECIFICATIONS

POWER OUTPUT	300W Max. / 250W RMS at 10% THD
INPUT	6 X Mic 0.65mV/4.7KΩ 2 X Aux 100mV/470kΩ, 1 X Line 1V/50kΩ
EFFECT	ECHO, REPEAT, DELAY
TONE CONTROLS	Bass ± 10dB AT 100Hz Treble ± 10dB AT 10kHz
OUTPUTS	Preamp 200mV/600Ω, Line 1V/1kΩ
SPEAKER OUTPUTS	2Ω, 4Ω, 8Ω, 70V & 100V
POWER SUPPLY	AC: 220-240V 50/60Hz DC: 24V (2 X 12V Car Battery)

DPA-250E

SPECIFICATIONS

POWER OUTPUT	300W Max. / 250W RMS at 10% THD
INPUT	6 X Mic 0.65mV/4.7KΩ 2 X Aux 100mV/470kΩ, 1 X Line 1V/50kΩ
TONE CONTROLS	Bass ± 10dB AT 100Hz Treble ± 10dB AT 10kHz
OUTPUTS	Preamp 200mV/600Ω, Line 1V/1kΩ
SPEAKER OUTPUTS	2Ω, 4Ω, 8Ω, 70V & 100V
POWER SUPPLY	AC: 220-240V 50/60Hz DC: 24V (2 X 12V Car Battery)

DPA-250MA

SPECIFICATIONS

POWER OUTPUT	200W Max. / 160W RMS at 10% THD
INPUT	5 X Mic 0.65mV/4.7KΩ, 2 X Aux 100mV/470kΩ, 1 X Line 1V/50kΩ
TONE CONTROLS	Bass ± 10dB AT 100Hz Treble ± 10dB AT 10kHz
EFFECT	ECHO, REPEAT, DELAY
OUTPUTS	Preamp 200mV/600Ω, Line 1V/1kΩ
SPEAKER OUTPUTS	2Ω, 4Ω, 8Ω, 70V & 100V
POWER SUPPLY	AC: 220-240V 50/60Hz DC: 24V (2 X 12V Car Battery)

DPA-160M

PROFESSIONAL DJ & PA AMPLIFIER



SPECIFICATIONS

	<i>DPA-120M</i>
POWER OUTPUT	160W Max. / 120W RMS at 10% THD
INPUT	5 X Mic 0.65mV/4.7kΩ 2 X Aux 100mV/470kΩ, 1 X Line 1V/50kΩ
TONE CONTROLS	Bass ± 10dB AT 100Hz Treble ± 10dB AT 10kHz
EFFECT	ECHO, REPEAT, DELAY
OUTPUTS	Preamp 200mV/600Ω, Line 1V/1kΩ
SPEAKER OUTPUTS	4Ω, 8Ω, 16Ω: 70V & 100V
POWER SUPPLY	AC: 220-240V 50/60Hz DC: 12V (1 X 12V Car Battery)

MOBILE PA AMPLIFIER - Built-in Digital Player & SIREN



SPECIFICATIONS

	<i>DPA-500SW</i>
POWER OUTPUT	40W
INPUT	1 UHF WIRELESS MIC/ 1 MIC WIRED & 1 AUX
DIGITAL PLAYER	Built-in Digital Player with MMC/USB Reader, Bluetooth, FM with LED Display
SIREN	Two Tone (Wailing & Yelping)
MOUNTING	Amplifier Mounting bracket supplied
POWER SUPPLY	12V Car Battery

SPECIFICATIONS

	<i>DPA-500S</i>
POWER OUTPUT	40W
INPUT	2 MIC WIRED & 1 AUX
DIGITAL PLAYER	Built-in Digital Player with MMC/USB Reader, Bluetooth, FM with LED Display
SIREN	Two Tone (Wailing & Yelping)
MOUNTING	Amplifier Mounting bracket supplied
POWER SUPPLY	12V Car Battery

MP3 RECORDER



SPECIFICATIONS

	<i>DPR-30</i>
INPUT/ OUTPUT	Stereo / Mono
DIGITAL PLAYER	Built-in Digital Recorder /Player & Bluetooth with LCD Display
TONE CONTROLS	Recording Level, Play Level
POWER SUPPLY	AC: 220-240V 50/60Hz DC: 12V (1 X 12V Car Battery)

PROFESSIONAL DJ & PA AMPLIFIER + DIGITAL PLAYER



SPECIFICATIONS	DJ-10000U
POWER OUTPUT	1000W Max. / 800W RMS at 10% THD
INPUT	1 X Aux 200mV/100kΩ 1 X Line 1V/50kΩ
DIGITAL PLAYER	Built-in Digital Player with SD/MMC/USB Reader with LCD Display
TONE CONTROLS	Bass ± 14dB AT 100Hz Mid ± 7dB AT 1kHz Treble ± 14dB AT 10kHz
OUTPUTS	Line 1V/1kHz
SPEAKER OUTPUTS	1Ω, 2Ω, 70V & 100V
POWER SUPPLY	AC: 220-240V 50/60Hz



SPECIFICATIONS	DZA-10000U
POWER OUTPUT	600W+600W Max. / 500W+500W RMS at 10% THD Each Zone
INPUT	Line 200mV/100kΩ Each Zone Line 1V/50kΩ Each Zone
DIGITAL PLAYER	Built-in Digital Player with SD/MMC/USB Input with LCD Display
TONE CONTROLS	Bass ± 10dB AT 100Hz Treble ± 10dB AT 10kHz
OUTPUTS	Line 1v/1kΩ
SPEAKER OUTPUTS	2Ω, 4Ω, 8Ω, 70V & 100V
POWER SUPPLY	AC: 220-240V 50/60Hz



SPECIFICATIONS	DJ-601U
POWER OUTPUT	800W Max. / 600W RMS at 10% THD Each Zone
INPUT	1 x Aux 100mV/470kΩ 1 x Mic 0.65mV/4.7kΩ 1 x Line 1V/10kΩ
DIGITAL PLAYER	Built-in Digital Player with SD/MMC/USB Reader with LCD Display
TONE CONTROLS	Bass ± 14dB AT 100Hz Mid ± 7dB AT 1kHz Treble ± 10dB AT 10kHz
OUTPUTS	Line 1v/1kΩ
SPEAKER OUTPUTS	2Ω, 4Ω, 70V & 100V
POWER SUPPLY	AC: 220-240V 50/60Hz



SPECIFICATIONS	TZA-5000U
POWER OUTPUT	300W+300W Max./250W + 250W RMS at 10% THD
INPUT	6 X Mic 0.65mV/4.7KΩ, 2 X Aux 100mV/470kΩ Stereo L/R 200mV/100kΩ, Line L/R 1V/50kΩ
DIGITAL PLAYER	Built-in Digital Player with SD/MMC/USB Reader with LCD Display
TONE CONTROLS	Bass ± 14dB AT 100Hz Treble ± 14dB AT 10kHz
OUTPUTS	Line 1v/1kΩ, Preamp 200mV/600Ω
SPEAKER OUTPUTS	2Ω, 4Ω, 70V & 100V
POWER SUPPLY	AC: 220-240V 50/60Hz, DC: 24V (2X12V Car Battery)

PROFESSIONAL DJ & PA AMPLIFIER + DIGITAL PLAYER



SPECIFICATIONS

POWER OUTPUT	450W Max. / 350W RMS at 10% THD
INPUT	5 X Mic 0.8mV/4.7KΩ 2 X Aux 100mV/470kΩ, 1 X Line 1V/50kΩ
DIGITAL PLAYER	Built-in Digital Player with SD/MMC/USB Bluetooth & FM Input with LCD Display
TONE CONTROLS	Bass ± 10dB AT 100Hz Treble ± 10dB AT 10kHz
OUTPUTS	Preamp 200mV/600Ω, Line 1V/1kΩ
SPEAKER OUTPUTS	2Ω, 4Ω, 8Ω, 70V & 100V
POWER SUPPLY	AC: 220-240V 50/60Hz DC: 36V (3 X 12V Car Battery)

DPA-350U

SPECIFICATIONS

POWER OUTPUT	350W Max. / 300W RMS at 10% THD
INPUT	7 X Mic 0.65mV/4.7KΩ 2 X Aux 100mV/470kΩ, 1 X Line 1V/50kΩ
DIGITAL PLAYER	Built-in Digital Player with SD/MMC/USB Bluetooth & FM Input with LCD Display
TONE CONTROLS	Bass ± 10dB AT 100Hz Treble ± 10dB AT 10kHz
EFFECT	ECHO, REPEAT, DELAY
OUTPUTS	Preamp 200mV/600Ω, Line 1V/1kΩ
SPEAKER OUTPUTS	2Ω, 4Ω, 8Ω, 70V & 100V
POWER SUPPLY	AC: 220-240V 50/60Hz DC: 24V (2 X 12V Car Battery)

DPA-300UE

SPECIFICATIONS

POWER OUTPUT	300W Max. / 250W RMS at 10% THD
INPUT	6 X Mic 0.65mV/4.7KΩ 2 X Aux 100mV/470kΩ, 1 X Line 1V/50kΩ
DIGITAL PLAYER	Built-in Digital Player with SD/MMC/USB Input with LCD Display
TONE CONTROLS	Bass ± 10dB AT 100Hz Treble ± 10dB AT 10kHz
OUTPUTS	Preamp 200mV/600Ω, Line 1V/1kΩ
SPEAKER OUTPUTS	2Ω, 4Ω, 8Ω, 70V & 100V
POWER SUPPLY	AC: 220-240V 50/60Hz DC: 24V (2 X 12V Car Battery)

DPA-250U

SPECIFICATIONS

POWER OUTPUT	300W Max. / 250W RMS at 10% THD
INPUT	6 X Mic 0.65mV/4.7KΩ 2 X Aux 100mV/470kΩ, 1 X Line 1V/50kΩ
DIGITAL PLAYER	Built-in Digital Player with SD/MMC/USB Bluetooth & FM Input with LED Display
TONE CONTROLS	Bass ± 10dB AT 100Hz Treble ± 10dB AT 10kHz
OUTPUTS	Preamp 200mV/600Ω, Line 1V/1kΩ
SPEAKER OUTPUTS	2Ω, 4Ω, 8Ω, 70V & 100V
POWER SUPPLY	AC: 220-240V 50/60Hz DC: 24V (2 X 12V Car Battery)

DPA-250UA

PA AMPLIFIER + DIGITAL PLAYER



SPECIFICATIONS

DPA-160U

POWER OUTPUT	200W Max. / 160W RMS at 10% THD
INPUT	5 X Mic 0.65mV/4.7KΩ 2 X Aux 100mV/470kΩ, 1 X Line 1V/50kΩ
DIGITAL PLAYER	Built-in Digital Player with SD/MMC/USB Bluetooth & FM Input with LCD Display
TONE CONTROLS	Bass ± 10dB AT 100Hz Treble ± 10dB AT 10kHz
OUTPUTS	Preamp 200mV/600Ω, Line 1v/1kΩ
SPEAKER OUTPUTS	2Ω, 4Ω, 8Ω, 70V & 100V
POWER SUPPLY	AC: 220-240V 50/60Hz DC: 24V (2 X 12V Car Battery)

SPECIFICATIONS

DPA-120U

POWER OUTPUT	160W Max. / 120W RMS at 10% THD
INPUT	5 X Mic 0.65mV/4.7KΩ 2 X Aux 100mV/470kΩ, 1 X Line 1V/50kΩ
DIGITAL PLAYER	Built-in Digital Player with SD/MMC/USB Bluetooth & FM Input with LCD Display
TONE CONTROLS	Bass ± 10dB AT 100Hz Treble ± 10dB AT 10kHz
OUTPUTS	Preamp 200mV/600Ω, Line 1v/1kΩ
SPEAKER OUTPUTS	4Ω, 8Ω, 16Ω; 70V & 100V
POWER SUPPLY	AC: 220-240V 50/60Hz DC: 12V (1 X 12V Car Battery)

SPECIFICATIONS

DPA-85U

POWER OUTPUT	110W Max. / 85W RMS at 10% THD
INPUT	4 X Mic 0.65mV/4.7KΩ 1 X Aux 100mV/470kΩ
DIGITAL PLAYER	Built-in Digital Player with SD/MMC/USB Input with LCD Display
TONE CONTROLS	Bass ± 10dB AT 100Hz Treble ± 10dB AT 10kHz
EFFECT	ECHO, REPEAT, DELAY
OUTPUTS	Line 1V/1kΩ
SPEAKER OUTPUTS	4Ω, 8Ω, 16Ω 70V & 100V
POWER SUPPLY	AC: 220-240V 50/60Hz DC: 12V (1 X 12V Car Battery)

SPECIFICATIONS

DPA-80U

POWER OUTPUT	110W Max. / 85W RMS at 10% THD
INPUT	4 X Mic 0.65mV/4.7KΩ 1 X Aux 100mV/470kΩ
DIGITAL PLAYER	Built-in Digital Player with SD/MMC/USB Bluetooth & FM Input with LED Display
TONE CONTROLS	Bass ± 10dB AT 100Hz Treble ± 10dB AT 10kHz
OUTPUTS	Line 1V/1kΩ
SPEAKER OUTPUTS	4Ω, 8Ω, 16Ω 70V & 100V
POWER SUPPLY	AC: 220-240V 50/60Hz DC: 12V (1 X 12V Car Battery)

PA AMPLIFIER + DIGITAL PLAYER + UHF WIRELESS MIC



SPECIFICATIONS

DPA-60U

POWER OUTPUT	85W Max. / 65W RMS at 10% THD
INPUT	3 X Mic 0.65mV/4.7KΩ 1 X Aux 100mV/470kΩ
DIGITAL PLAYER	Built-in Digital Player with SD/MMC/USB Bluetooth & FM Input with LED Display
TONE CONTROLS	Bass ± 10dB AT 100Hz Treble ± 10dB AT 10kHz
OUTPUTS	Line 1V/1kΩ
SPEAKER OUTPUTS	4Ω, 8Ω, 16Ω 100V
POWER SUPPLY	AC: 220-240V 50/60Hz DC: 12V (1 X 12V Car Battery)

SPECIFICATIONS

DPA-65U

POWER OUTPUT	85W Max. / 65W RMS at 10% THD
INPUT	3 X Mic 0.65mV/4.7KΩ 1 X Aux 100mV/470kΩ
DIGITAL PLAYER	Built-in Digital Player with SD/MMC/USB Bluetooth & FM Input with LCD Display
TONE CONTROLS	Bass ± 10dB AT 100Hz Treble ± 10dB AT 10kHz
EFFECT	ECHO, REPEAT, DELAY
OUTPUTS	Line 1V/1kΩ
SPEAKER OUTPUTS	4Ω, 8Ω, 16Ω 100V
POWER SUPPLY	AC: 220-240V 50/60Hz DC: 12V (1 X 12V Car Battery)

SPECIFICATIONS

DPA-35U

POWER OUTPUT	40W Max. / 35W RMS at 10% THD
INPUT	2 X Mic 0.65mV/4.7KΩ 1 X Aux 100mV/470kΩ
DIGITAL PLAYER	Built-in Digital Player with FM/SD/MMC/USB Reader with LCD Display
TONE CONTROLS	Bass ± 10dB AT 100Hz Treble ± 10dB AT 10kHz
OUTPUTS	Line 1V/1kΩ
SPEAKER OUTPUTS	4Ω, 8Ω, 16Ω & 100V
POWER SUPPLY	AC: 220-240V 50/60Hz DC: 12V (3 X 12V Car Battery)

SPECIFICATIONS

DPA-35W - UHF wireless mic In-Built

POWER OUTPUT	40W Max. / 35W RMS at 10% THD
INPUT	2 X Mic 0.65mV/4.7KΩ 1 X Aux 100mV/470kΩ
DIGITAL PLAYER	Built-in Digital Player with fm/SD/MMC/USB Reader with LCD Display
WIRELESS MIC	UHF Hand Mic
TONE CONTROLS	Bass ± 10dB AT 100Hz Treble ± 10dB AT 10kHz
OUTPUTS	Line 1V/1KΩ
SPEAKER OUTPUTS	4Ω, 8Ω, 16Ω & 100V
POWER SUPPLY	AC: 220-240V 50/60Hz DC: 12V (1 X 12V Car Battery)

PA AMPLIFIER + DIGITAL PLAYER



SPECIFICATIONS	DPA-85W - UHF wireless mic In-Built
POWER OUTPUT	110W Max. / 85W RMS at 10% THD
INPUT	4 X Mic 0.65mV/4.7KΩ 1 X Aux 100mV/470kΩ
DIGITAL PLAYER	Built-in Digital Player with FM/SD/MMC/USB Reader with LCD Display
WIRELESS MIC	UHF Hand Mic
TONE CONTROLS	Bass ± 10dB AT 100Hz Treble ± 10dB AT 10kHz
OUTPUTS	Line 1V/1kΩ
SPEAKER OUTPUTS	4Ω, 8Ω, 16Ω, 70V & 100V
POWER SUPPLY	AC: 220-240V 50/60Hz DC: 12V (1 X 12V Car Battery)

SPECIFICATIONS	DPA-40U
POWER OUTPUT	60W Max./40W RMS at 10% THD
INPUT	3 X Mic 0.65mV/4.7KΩ 1 X Aux 100mV/470kΩ
DIGITAL PLAYER	Built-in Digital Player with SD/MMC/USB Bluetooth & FM Input with LCD Display
TONE CONTROLS	Bass ± 10dB AT 100Hz, Treble ± 10dB AT 10kHz
SPEAKER OUTPUTS	4Ω, 8Ω, 16Ω & 100V
POWER SUPPLY	AC: 220-240V 50/60Hz DC: 12V (1X12V Car Battery)

SPECIFICATIONS	DPA-50U
POWER OUTPUT	70W Max./50W RMS at 10% THD
INPUT	3 X Mic 0.65mV/4.7KΩ 1 X Aux 100mV/470kΩ
DIGITAL PLAYER	Built-in Digital Player with SD/MMC/USB Bluetooth & FM Input with LCD Display
TONE CONTROLS	Bass ± 10dB AT 100Hz, Treble ± 10dB AT 10kHz
SPEAKER OUTPUTS	4Ω, 8Ω, 16Ω & 100V
POWER SUPPLY	AC: 220-240V 50/60Hz DC: 12V (1X12V Car Battery)

SPECIFICATIONS	DPA-4040
POWER OUTPUT	STEREO 20W + 20W
INPUT	1 Mic 1 X Aux
DIGITAL PLAYER	Built-in Digital Player with SD/MMC/USB Bluetooth & FM Input with LCD Display
TONE CONTROLS	Bass, Treble, Echo
SPEAKER OUTPUTS	4Ω each channel
POWER SUPPLY	AC: 220-240V 50/60Hz DC: 12V (1 X 12V Car Battery)

PA AMPLIFIER + DIGITAL PLAYER



SPECIFICATIONS	<i>PRX 2404 PRO MIX</i>
MIC / LINE INPUT	24 MIC Balanced Input / 26 Line Input
TONE CONTROL	Bass $\pm 15\text{dB}$ at 100Hz Mid $\pm 15\text{dB}$ at 2kHz Treble $\pm 15\text{dB}$ at 10kHz
ECHO/REVERB SYSTEM	Digital Echo System
SEND FUNCTION	Available
MAIN OUTPUT	XLR, PHONO
VOLUME CONTROL - EACH CHANNEL	Slide Type
POWER REQUIREMENT	AC 220-240V 50/60Hz

SPECIFICATIONS	<i>PRX 1604 PRO MIX</i>
MIC / LINE INPUT	16 MIC Balanced Input / 18 Line Input
TONE CONTROL	Bass $\pm 15\text{dB}$ at 100Hz Mid $\pm 15\text{dB}$ at 2kHz Treble $\pm 15\text{dB}$ at 10kHz
ECHO/REVERB SYSTEM	Digital Echo System
SEND FUNCTION	Available
MAIN OUTPUT	XLR, PHONO
VOLUME CONTROL - EACH CHANNEL	Slide Type
POWER REQUIREMENT	AC 220-240V 50/60Hz

PROFESSIONAL AUDIO MIXERS & EFFECT UNITS



SPECIFICATIONS

	mini-6DP
MIC / LINE INPUT	5 Mic/line + 1 stereo input + USB + Bluetooth
TONE CONTROL	Bass ± 15 dB at 100Hz Treble ± 15 dB at 10kHz
ECHO/REVERB SYSTEM	Digital Echo System
DIGITAL PLAYER	USB / Bluetooth / Recording
MAIN OUTPUT	PHONO
VOLUME CONTROL - EACH CHANNEL	Rotary Type
POWER REQUIREMENT	AC 220-240V 50/60Hz



SPECIFICATIONS


	FIRE 8
MIC / LINE INPUT	8 MIC Balanced Input /8 Line Input
TONE CONTROL	Bass ± 15 dB at 100Hz Mid ± 15 dB at 2kHz Treble ± 15 dB at 10kHz
ECHO/REVERB SYSTEM	Digital Echo System
SEND FUNCTION	Available
MAIN OUTPUT	XLR, PHONO
VOLUME CONTROL - EACH CHANNEL	Slide Type
POWER REQUIREMENT	AC 220-240V 50/60Hz



SPECIFICATIONS

	FIRE 12
MIC / LINE INPUT	12 MIC Balanced Input /12 Line Input
TONE CONTROL	Bass ± 15 dB at 100Hz Mid ± 15 dB at 2kHz Treble ± 15 dB at 10kHz
ECHO/REVERB SYSTEM	Digital Echo System
SEND FUNCTION	Available
MAIN OUTPUT	XLR, PHONO
VOLUME CONTROL - EACH CHANNEL	Slide Type
POWER REQUIREMENT	AC 220-240V 50/60Hz

PROFESSIONAL AUDIO MIXERS

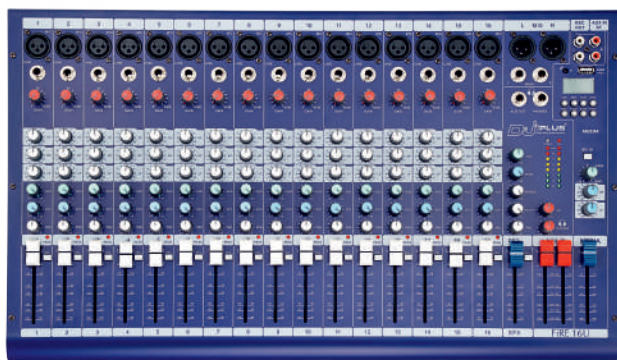

SPECIFICATIONS

	<i>FIRE 16U</i>
MIC / LINE INPUT	16 MIC Balanced Input /16 Line Input
TONE CONTROL	Bass ± 15 dB at 100Hz Mid ± 15 dB at 2kHz Treble ± 15 dB at 10kHz
ECHO/REVERB SYSTEM	Digital Echo System
SEND FUNCTION	Available
MAIN OUTPUT	XLR, PHONO
VOLUME CONTROL - EACH CHANNEL	Slide Type
POWER REQUIREMENT	AC 220-240V 50/60Hz



SPECIFICATIONS

	<i>FIRE 12U</i>
MIC / LINE INPUT	12 MIC Balanced Input /12 Line Input
TONE CONTROL	Bass ± 15 dB at 100Hz Mid ± 15 dB at 2kHz Treble ± 15 dB at 10kHz
ECHO/REVERB SYSTEM	Digital Echo System
SEND FUNCTION	Available
MAIN OUTPUT	XLR, PHONO
VOLUME CONTROL - EACH CHANNEL	Slide Type
POWER REQUIREMENT	AC 220-240V 50/60Hz



SPECIFICATIONS

	<i>FIRE 8U</i>
MIC / LINE INPUT	8 MIC Balanced Input /8 Line Input
TONE CONTROL	Bass ± 15 dB at 100Hz Mid ± 15 dB at 2kHz Treble ± 15 dB at 10kHz
ECHO/REVERB SYSTEM	Digital Echo System
SEND FUNCTION	Available
MAIN OUTPUT	XLR, PHONO
VOLUME CONTROL - EACH CHANNEL	Slide Type
POWER REQUIREMENT	AC 220-240V 50/60Hz

PROFESSIONAL AUDIO MIXERS



SPECIFICATIONS

	<i>FIRE 16.2</i>
MIC / LINE INPUT	16 MIC Balanced Input /16 Line Input
TONE CONTROL	Bass ± 15 dB at 100Hz Mid ± 15 dB at 2kHz Treble ± 15 dB at 10kHz
ECHO/REVERB SYSTEM	Digital Echo System
SEND FUNCTION	Available
MAIN OUTPUT	XLR, PHONO
VOLUME CONTROL - EACH CHANNEL	Slide Type
POWER REQUIREMENT	AC 220-240V 50/60Hz

FIRE 16.2



SPECIFICATIONS

	<i>FIRE 12.2</i>
MIC / LINE INPUT	12 MIC Balanced Input /12 Line Input
TONE CONTROL	Bass ± 15 dB at 100Hz Mid ± 15 dB at 2kHz Treble ± 15 dB at 10kHz
ECHO/REVERB SYSTEM	Digital Echo System
SEND FUNCTION	Available
MAIN OUTPUT	XLR, PHONO
VOLUME CONTROL - EACH CHANNEL	Slide Type
POWER REQUIREMENT	AC 220-240V 50/60Hz

FIRE 12.2



SPECIFICATIONS

	<i>FIRE 8.2</i>
MIC / LINE INPUT	8 MIC Balanced Input /8 Line Input
TONE CONTROL	Bass ± 15 dB at 100Hz Mid ± 15 dB at 2kHz Treble ± 15 dB at 10kHz
ECHO/REVERB SYSTEM	Digital Echo System
SEND FUNCTION	Available
MAIN OUTPUT	XLR, PHONO
VOLUME CONTROL - EACH CHANNEL	Slide Type
POWER REQUIREMENT	AC 220-240V 50/60Hz

FIRE 8.2



SPECIFICATIONS

MIC / LINE INPUT	8 MIC Input / 8 LINE Input
TONE CONTROL	Bass ± 15 dB at 100Hz Mid ± 15 dB at 2kHz Treble ± 15 dB at 10kHz
ECHO/REVERB SYSTEM	Digital Echo System
OUTPUT	Main 6.35, PHONO 6.36
VOLUME CONTROL - EACH CHANNEL	Slide Type
DIGITAL PLAYER	Bluetooth
POWER REQUIREMENT	AC 220-240V 50/60Hz

DM-801FX

SPECIFICATIONS

MIC / LINE INPUT	8 MIC Input / 8 LINE Input / 2 AUX
TONE CONTROL	Bass ± 15 dB at 100Hz Mid ± 15 dB at 2kHz Treble ± 15 dB at 10kHz
ECHO/REVERB SYSTEM	Digital Echo System
OUTPUT	Main XLR / 6.35, PHONO 6.36
VOLUME CONTROL - EACH CHANNEL	Slide Type
DIGITAL PLAYER	Bluetooth
POWER REQUIREMENT	AC 220-240V 50/60Hz

DM-802FX

SPECIFICATIONS

MIC / LINE INPUT	12 MIC Input / 12 LINE Input
TONE CONTROL	Bass ± 15 dB at 100Hz Mid ± 15 dB at 2kHz Treble ± 15 dB at 10kHz
ECHO/REVERB SYSTEM	Digital Echo System
OUTPUT	Main 6.35, PHONO 6.36
VOLUME CONTROL - EACH CHANNEL	Slide Type
DIGITAL PLAYER	Bluetooth
POWER REQUIREMENT	AC 220-240V 50/60Hz

DM-1201FX

SPECIFICATIONS

MIC / LINE INPUT	12 MIC Input / 12 LINE Input / 2 AUX
TONE CONTROL	Bass ± 15 dB at 100Hz Mid ± 15 dB at 2kHz Treble ± 15 dB at 10kHz
ECHO/REVERB SYSTEM	Digital Echo System
OUTPUT	Main XLR / 6.35, PHONO 6.36
VOLUME CONTROL - EACH CHANNEL	Slide Type
DIGITAL PLAYER	Bluetooth
POWER REQUIREMENT	AC 220-240V 50/60Hz

DM-1202FX

PROFESSIONAL AUDIO MIXERS & EFFECT UNITS



SPECIFICATIONS	DM-1201UR (RECORDER)
MIC / LINE INPUT	12 MIC Balanced Input / 12 LINE Input
TONE CONTROL	Bass $\pm 15\text{dB}$ at 100Hz Mid $\pm 15\text{dB}$ at 2kHz Treble $\pm 15\text{dB}$ at 10kHz
ECHO/REVERB SYSTEM	Digital Echo System
SEND RETURN FUNCTION	Available
MAIN OUTPUT	Main 6.35, PHONO 6.36
VOLUME CONTROL - EACH CHANNEL	Slide Type
DIGITAL PLAYER	In-Built Digital Player with Recorder
POWER REQUIREMENT	AC 220-240V 50/60Hz



SPECIFICATIONS	DM-60U
MIC / LINE INPUT	6 MIC Input / 6 LINE Input
TONE CONTROL	Bass $\pm 15\text{dB}$ at 100Hz Mid $\pm 15\text{dB}$ at 2kHz Treble $\pm 15\text{dB}$ at 10kHz
ECHO/REVERB SYSTEM	Digital Echo System
MAIN OUTPUT	4 Outputs With Send & Return Function
VOLUME CONTROL - EACH CHANNEL	Slide Type
DIGITAL PLAYER	In-Built Digital Player
POWER REQUIREMENT	AC 220-240V 50/60Hz



SPECIFICATIONS	DM-80U
MIC / LINE INPUT	8 MIC Input / 8 LINE Input
TONE CONTROL	Bass $\pm 15\text{dB}$ at 100Hz Mid $\pm 15\text{dB}$ at 2kHz Treble $\pm 15\text{dB}$ at 10kHz
ECHO/REVERB SYSTEM	Digital Echo System
MAIN OUTPUT	4 Outputs With Send & Return Function
VOLUME CONTROL - EACH CHANNEL	Slide Type
DIGITAL PLAYER	In-Built Digital Player
POWER REQUIREMENT	AC 220-240V 50/60Hz



SPECIFICATIONS	DM-120U
MIC / LINE INPUT	12 MIC Input / 12 LINE Input
TONE CONTROL	Bass $\pm 15\text{dB}$ at 100Hz Mid $\pm 15\text{dB}$ at 2kHz Treble $\pm 15\text{dB}$ at 10kHz
ECHO/REVERB SYSTEM	Digital Echo System
MAIN OUTPUT	4 Outputs With Send & Return Function
VOLUME CONTROL - EACH CHANNEL	Slide Type
DIGITAL PLAYER	In-Built Digital Player
POWER REQUIREMENT	AC 220-240V 50/60Hz



SPECIFICATIONS

DM-8

MIC / LINE INPUT	8 MIC Input / 8 LINE Input
TONE CONTROL	Bass ± 15 dB at 100Hz Treble ± 15 dB at 10kHz
ECHO/REVERB SYSTEM	Digital Echo System
MAIN OUTPUT	PHONO
VOLUME CONTROL - EACH CHANNEL	Rotary Type
POWER REQUIREMENT	AC 220-240V 50/60Hz



SPECIFICATIONS

DM-8U

MIC / LINE INPUT	8 MIC Input / 8 LINE Input
TONE CONTROL	Bass ± 15 dB at 100Hz Treble ± 15 dB at 10kHz
ECHO/REVERB SYSTEM	Digital Echo System
MAIN OUTPUT	PHONO
VOLUME CONTROL - EACH CHANNEL	Rotary Type
DIGITAL PLAYER	In-Built Digital Player
POWER REQUIREMENT	AC 220-240V 50/60Hz



SPECIFICATIONS

DM-6

MIC / LINE INPUT	6 MIC Input / 6 LINE Input
TONE CONTROL	Bass ± 15 dB at 100Hz Treble ± 15 dB at 10kHz
ECHO/REVERB SYSTEM	Digital Echo System
MAIN OUTPUT	PHONO
VOLUME CONTROL - EACH CHANNEL	Rotary Type
POWER REQUIREMENT	AC 220-240V 50/60Hz



SPECIFICATIONS

DM-6U

MIC / LINE INPUT	6 MIC Input / 6 LINE Input
TONE CONTROL	Bass ± 15 dB at 100Hz Treble ± 15 dB at 10kHz
ECHO/REVERB SYSTEM	Digital Echo System
MAIN OUTPUT	PHONO
VOLUME CONTROL - EACH CHANNEL	Rotary Type
DIGITAL PLAYER	In-Built Digital Player
POWER REQUIREMENT	AC 220-240V 50/60Hz

PROFESSIONAL MIXER & EFFECT UNITS



SPECIFICATIONS

SM-802U

MIC / LINE INPUT	8 MIC Balanced Input / 8 LINE Input
TONE CONTROL	Bass ± 15 dB at 100Hz Mid ± 15 dB at 2kHz Treble ± 15 dB at 10kHz
ECHO/REVERB SYSTEM	Digital Echo System
SEND RETURN FUNCTION	Available
MAIN OUTPUT	XLR, PHONO
VOLUME CONTROL - EACH CHANNEL	Slide Type
DIGITAL PLAYER	In-Built Digital Player
POWER REQUIREMENT	AC 220-240V 50/60Hz

SPECIFICATIONS

SM-1202U

MIC / LINE INPUT	12 MIC Balanced Input / 12 LINE Input
TONE CONTROL	Bass ± 15 dB at 100Hz Mid ± 15 dB at 2kHz Treble ± 15 dB at 10kHz
ECHO/REVERB SYSTEM	Digital Echo System
SEND RETURN FUNCTION	Available
MAIN OUTPUT	XLR, PHONO
VOLUME CONTROL - EACH CHANNEL	Slide Type
DIGITAL PLAYER	In-Built Digital Player
POWER REQUIREMENT	AC 220-240V 50/60Hz

SPECIFICATIONS

DE-2002

MIC / LINE INPUT	2 Mic input
TONE CONTROL	Volume - MIC 1, MIC 2, Echo, Feedback, Delay
ECHO/REVERB SYSTEM	Digital Echo System
MAIN OUTPUT	1 output
VOLUME CONTROL - EACH CHANNEL	Rotary Type
POWER REQUIREMENT	AC 220-240V 50/60Hz

SPECIFICATIONS

DE-2003

MIC / LINE INPUT	2 Mic input
TONE CONTROL	Volume - MIC 1, MIC 2, Echo, Feedback, Delay, Bass, Treble, Master
ECHO/REVERB SYSTEM	Digital Echo System
MAIN OUTPUT	1 output
VOLUME CONTROL - EACH CHANNEL	Rotary Type
POWER REQUIREMENT	AC 220-240V 50/60Hz

PROFESSIONAL MIXER & EFFECT UNITS



SPECIFICATIONS	<i>DE-2004</i>
MIC / LINE INPUT	4 Mic input
TONE CONTROL	Volume - MIC 1, MIC 2, MIC 3, MIC 4, Echo, Feedback, Delay, Master
ECHO/REVERB SYSTEM	Digital Echo System
MAIN OUTPUT	1 output
VOLUME CONTROL - EACH CHANNEL	Rotary Type
POWER REQUIREMENT	AC 220-240V 50/60Hz

SPECIFICATIONS	<i>DE-2005</i>
MIC / LINE INPUT	4 Mic input
TONE CONTROL	Volume - MIC 1, MIC 2, MIC 3, MIC 4, Echo, Feedback, Delay, Bass, Treble, Master
ECHO/REVERB SYSTEM	Digital Echo System
MAIN OUTPUT	1 output
VOLUME CONTROL - EACH CHANNEL	Rotary Type
POWER REQUIREMENT	AC 220-240V 50/60Hz

AUDIOMAN DJ MIXERS



M4



SPECIFICATIONS	<i>AUDIOMAN M4</i>
MIC / LINE INPUT	1 MIC Balanced Input / 3 Line Input
TONE CONTROL	Bass ± 15 dB at 100Hz Mid ± 15 dB at 2kHz Treble ± 15 dB at 10kHz
MAIN OUTPUT	XLR, PHONO
VOLUME CONTROL - EACH CHANNEL	Slide Type
POWER REQUIREMENT	AC 220-240V 50/60Hz

SPECIFICATIONS	<i>AUDIOMAN MX300KE</i>
MIC / LINE INPUT	1 MIC Balanced Input / 3 Line Input
TONE CONTROL	Bass ± 15 dB at 100Hz Mid ± 15 dB at 2kHz Treble ± 15 dB at 10kHz
MAIN OUTPUT	XLR, PHONO
VOLUME CONTROL - EACH CHANNEL	Slide Type
POWER REQUIREMENT	AC 220-240V 50/60Hz

PROFESSIONAL MIXER & EFFECT UNITS



SPECIFICATIONS

AM-1404

MIC / LINE INPUT	12 MIC Balanced Input / 14 LINE Input
TONE CONTROL	Bass ± 15 dB at 100Hz Mid ± 15 dB at 2kHz Treble ± 15 dB at 10kHz
MID SWEEP	YES
SEND RETURN FUNCTION	Available
MAIN OUTPUT	XLR, PHONO
VOLUME CONTROL - EACH CHANNEL	Slide Type
GROUP	2
PHANTOM POWER	48V Available
POWER REQUIREMENT	AC 220-240V 50/60Hz



SPECIFICATIONS

AMX-1804FX

MIC / LINE INPUT	14 MIC Balanced Input / 18 Line Input
TONE CONTROL	Bass ± 15 dB at 100Hz Mid ± 15 dB at 2kHz Treble ± 15 dB at 10kHz
MID SWEEP	YES
SEND RETURN FUNCTION	Available
MAIN OUTPUT	XLR, PHONO
VOLUME CONTROL - EACH CHANNEL	Slide Type
GROUP	2
PHANTOM POWER	48V Available
POWER REQUIREMENT	AC 220-240V 50/60Hz



SPECIFICATIONS

AMX-2604FX

MIC / LINE INPUT	22 MIC Balanced Input / 26 Line Input
TONE CONTROL	Bass ± 15 dB at 100Hz Mid ± 15 dB at 2kHz Treble ± 15 dB at 10kHz
MID SWEEP	YES
SEND RETURN FUNCTION	Available
MAIN OUTPUT	XLR, PHONO
VOLUME CONTROL - EACH CHANNEL	Slide Type
GROUP	2
PHANTOM POWER	48V Available
POWER REQUIREMENT	AC 220-240V 50/60Hz

PRO DYNAMIC MICROPHONE



PRO-610



PRO-650

SPECIFICATIONS	PRO-610	PRO-650
APPLICATION	MULTI PURPOSE	MULTI PURPOSE
FREQUENCY RESPONSE	50Hz to 18,000Hz	50Hz to 18,000Hz
IMPEDANCE	600 Ω	600 Ω
SENSITIVITY	-72dB ± 3dB	-72dB ± 3dB
CABLE LENGTH	5 MT XLR TO PHONO	5 MT XLR TO PHONO



SM-1000XLR



PRO-77T



PRO-980

SPECIFICATIONS	SM-1000XLR	SPECIFICATIONS	PRO-77T	PRO-980
APPLICATION	STAGE	APPLICATION	GENERAL	MULTI PURPOSE
FREQUENCY RESPONSE	40Hz to 17000Hz	FREQUENCY RESPONSE	80Hz to 10,000Hz	50Hz to 15,000Hz
IMPEDANCE	1000 Ω	IMPEDANCE	600 Ω	600 Ω
SENSITIVITY	-72dB ± 3dB	SENSITIVITY	-72dB ± 3dB	-72dB ± 3dB
CABLE LENGTH	5 MT XLR TO PHONO	CABLE LENGTH	4.5 MT XLR TO PHONO	5 MT XLR TO PHONO



UDM-69XLR



UDM-98XLR

SPECIFICATIONS	UDM-69XLR	UDM-98XLR
APPLICATION	GENERAL	MULTI PURPOSE
FREQUENCY RESPONSE	80Hz to 10,000Hz	50Hz to 15,000Hz
IMPEDANCE	600 Ω	600 Ω
SENSITIVITY	-72dB ± 3dB	-72dB ± 3dB
CABLE LENGTH	4.5 MT XLR TO PHONO	5 MT XLR TO PHONO



PRO DYNAMIC MICROPHONE



PRO-670



PRO-680

SPECIFICATIONS	PRO-670	PRO-680
APPLICATION	MULTI PURPOSE	MULTI PURPOSE
FREQUENCY RESPONSE	50Hz to 18,000Hz	50Hz to 18,000Hz
IMPEDANCE	600 Ω	600 Ω
SENSITIVITY	-72dB $\pm$ 3dB	-72dB $\pm$ 3dB
CABLE LENGTH	5 MT XLR TO PHONO	5 MT XLR TO PHONO



PRO-570



PRO-580



PRO-590

SPECIFICATIONS	PRO-570	PRO-580	PRO-590
APPLICATION	MULTI PURPOSE	MULTI PURPOSE	MULTI PURPOSE
FREQUENCY RESPONSE	80Hz to 15,000Hz	50Hz to 15,000Hz	50Hz to 15,000Hz
IMPEDANCE	600 Ω	600 Ω	600 Ω
SENSITIVITY	-72dB $\pm$ 3dB	-72dB $\pm$ 3dB	-72dB $\pm$ 3dB
CABLE LENGTH	4.5 MT XLR TO PHONO	5 MT XLR TO PHONO	5 MT XLR TO PHONO

PRO HEAD MICROPHONE



SPECIFICATIONS	HM-200C
DIRECTIVITY	Omni-directional
FREQUENCY RESPONSE	Frequency Range: 20Hz~20kHz
IMPEDANCE	$\leq$ 2.2 K Ω
SENSITIVITY	- 46db $\pm$ 2db
OPERATING VOLTAGE	Standard : 2V - 10V DC
CABLE LENGTH	Wire 1.2M



SPECIFICATIONS	HM-80B
DIRECTIVITY	Uni-directional
FREQUENCY RESPONSE	Frequency Range: 20Hz~20kHz
IMPEDANCE	$\leq$ 680 Ω
SENSITIVITY	- 48db $\pm$ 2db
OPERATING VOLTAGE	Standard : 1.5V - 10V DC
CABLE LENGTH	Wire 1.2M

PROFESSIONAL MEETING MICROPHONE



GM-825L



GM-815L



GM-805

SPECIFICATIONS	GM-825L	GM-815L	GM-805
APPLICATION	MEETING	MEETING	MEETING
MICROPHONE CARTRIDGE TYPE	CONDENSER	CONDENSER	CONDENSER
DIRECTIVITY	HYPER CARDIOID	HYPER CARDIOID	CARDIOID
FREQUENCY RESPONSE	80Hz ~ 13KHz	80Hz ~ 13KHz	100Hz ~ 10KHz
IMPEDANCE	200 Ω	200 Ω	200 Ω
SENSITIVITY	-32dB±3dB(0dB=1v/Pa 1kHz)	-34dB±3dB(0dB=1v/Pa 1kHz)	-38dB±3dB(0dB=1v/Pa 1kHz)
POWER SUPPLY	DC 3V -AA X 2 BATTERY	DC 3V -AA X 2 BATTERY	DC 3V -AA X 2 BATTERY
ACCESSORIES	METAL BASE / WINDSHIELD FOAM / 10MT CABLE	METAL BASE / WINDSHIELD FOAM / 10MT CABLE	ABS BASE / WIND SCREEN FOAM / 5MT CABLE
LENGTH (mm)	550 mm	600 mm	550 mm



GM-830XL



DGM-1000

SPECIFICATIONS	GM-830XL	DGM-1000
APPLICATION	MEETING	MEETING/GENERAL PURPOSE
MICROPHONE CARTRIDGE TYPE	CONDENSER	DYNAMIC
DIRECTIVITY	HYPER CARDIOID	HYPER CARDIOID
FREQUENCY RESPONSE	80Hz ~ 13KHz	100Hz ~ 13KHz
IMPEDANCE	200 Ω	600 Ω
SENSITIVITY	-32dB±3dB(0dB=1v/Pa 1kHz)	-53dB±3dB(0dB=1v/Pa 1kHz)
ACCESSORIES	METAL BASE / WINDSHIELD FOAM / 10MT CABLE	METAL STAND ADOPTER / 10MT CABLE
LENGTH (mm)	550 mm	470 mm

WIRELESS MEETING MICROPHONE



DWM-760G1



DWM-760G2

SPECIFICATIONS	DWM-760G1	DWM-760G2
MICROPHONE:	Gooseneck- Single	Gooseneck- Dual
RF OUTPUT POWER	20mW (Max.)	20mW (Max.)
MODULATION MODE	UHF	UHF
MICROPHONE ELEMENT	Condenser Super Cardioid	Condenser Super Cardioid
CARRIER FREQUENCY	700~800 MHz	700~800 MHz
BATTERY LIFE	6 ~ 8 hrs. depend on battery quality	6 ~ 8 hrs. depend on battery quality
POWER REQUIRED	Battery AA - 2 X 1.5V	Battery AA - 2 X 1.5V
RECEIVER:	Single Channel System	Dual Channel System
AUDIO OUTPUT	Balanced 0-50mV Unbalanced HI: 0-80mV; LO: 0-25mV	Balanced 0-50mV Unbalanced HI: 0-80mV; LO: 0-25mV
FREQUENCY RESPONSE	50-16000Hz	50-16000Hz
POWER REQUIRED	240V AC 50Hz for Adaptor	240V AC 50Hz for Adaptor
CONTROLS	Power ON/OFF Switch, Audio Output Volume Control for each channel	Power ON/OFF Switch, Audio Output Volume Control for each channel
OPERATING RANGE (APPROX.)	30 ~ 50 Meters	30 ~ 50 Meters



PROFESSIONAL WIRELESS MICROPHONES - UHF - MULTI FREQUENCY



DWM-XRD 400 H2



DWM-XRD 400 T2



DWM-XRD 400 HT

SPECIFICATIONS	DWM-XRD 400 H2	DWM-XRD 400 HT	DWM-XRD 400 T2
MICROPHONE:	Hand Held Mic	Body Pack + Hand Mic	Dual Body Pack + Tie Mic
RF OUTPUT POWER	20mW (Max.)	20mW (Max.)	20mW (Max.)
MODULATION MODE	UHF	UHF	UHF
MICROPHONE ELEMENT	Dynamic Super Cardioid	Dynamic Super Cardioid	Dynamic Super Cardioid
CARRIER FREQUENCY	700~800 MHz	700~800 MHz	700~800 MHz
BATTERY LIFE	6 ~ 8 hrs. depend on battery quality	6 ~ 8 hrs. depend on battery quality	6 ~ 8 hrs. depend on battery quality
POWER REQUIRED	Battery AA - 2 X 1.5V	Battery AA - 2 X 1.5V	Battery AA - 2 X 1.5V
RECEIVER:	Dual Channel System	Dual Channel System	Dual Channel System
AUDIO OUTPUT	Balanced 0-50mV Unbalanced HI: 0-80mV; LO: 0-25mV	Balanced 0-50mV Unbalanced HI: 0-80mV; LO: 0-25mV	Balanced 0-50mV Unbalanced HI: 0-80mV; LO: 0-25mV
FREQUENCY RESPONSE	50-16000Hz	50-16000Hz	50-16000Hz
POWER REQUIRED	240V AC 50Hz for Adaptor	240V AC 50Hz for Adaptor	240V AC 50Hz for Adaptor
CONTROLS	Power ON/OFF Switch, Audio Output Volume Control for each channel	Power ON/OFF Switch, Audio Output Volume Control for each channel	Power ON/OFF Switch, Audio Output Volume Control for each channel
OPERATING RANGE (APPROX.)	50 ~ 100 Meters	50 ~ 100 Meters	50 ~ 100 Meters

PROFESSIONAL WIRELESS MICROPHONES - UHF



DWM-797H2



DWM-797H1



DWM-797HT



SPECIFICATIONS	DWM-797H2 - UHF	DWM-797H1 - UHF	DWM-797HT - UHF
MICROPHONE:	Hand Held Mic - Dual	Hand Held Mic - Single	Hand Held Mic & Body Pack + Head Mic
RF OUTPUT POWER	20mW (Max.)	20mW (Max.)	20mW (Max.)
MODULATION MODE	UHF	UHF	UHF
MICROPHONE ELEMENT	Dynamic Super Cardioid	Dynamic Super Cardioid	Dynamic Super Cardioid
CARRIER FREQUENCY	700 ~ 800MHz	700 ~ 800MHz	700 ~ 800MHz
BATTERY LIFE	6 ~ 8 hrs. depend on battery quality	6 ~ 8 hrs. depend on battery quality	6 ~ 8 hrs. depend on battery quality
POWER REQUIRED	Battery AA - 2 X 1.5V	Battery AA - 2 X 1.5V	Battery AA - 2 X 1.5V
RECEIVER:	Dual Channel System	Single Channel System	Dual Channel System
AUDIO OUTPUT	Balanced 0-50mV Unbalanced HI: 0-80mV; LO: 0-25mV	Balanced 0-50mV Unbalanced HI: 0-80mV; LO: 0-25mV	Balanced 0-50mV Unbalanced HI: 0-80mV; LO: 0-25mV
FREQUENCY RESPONSE	50-16000Hz	50-16000Hz	50-16000Hz
POWER REQUIRED	240V AC 50Hz for Adapter	240V AC 50Hz for Adapter	240V AC 50Hz for Adapter
CONTROLS	Power ON/OFF Switch, Audio Output Volume Control for each channel	Power ON/OFF Switch, Audio Output Volume Control for each channel	Power ON/OFF Switch, Audio Output Volume Control for each channel
OPERATING RANGE (APPROX.)	50 ~ 100 Meters	50 ~ 100 Meters	50 ~ 100 Meters



DWM-797T1



DWM-797T2



T-80

SPECIFICATIONS	DWM-797T1 - UHF	DWM-797T2 - UHF	T-80
MICROPHONE:	Body Pack + Head Mic	Body Pack + Head Mic - Dual	Hand Held Mic - Dual
RF OUTPUT POWER	20mW (Max.)	20mW (Max.)	20mW (Max.)
MODULATION MODE	UHF	UHF	UHF
MICROPHONE ELEMENT	Condenser	Condenser	Dynamic Super Cardiod
CARRIER FREQUENCY	700 ~ 800MHz	700 ~ 800MHz	200 Multi Frequency
BATTERY LIFE	6 ~ 8 hrs. depend on battery quality	6 ~ 8 hrs. depend on battery quality	6 ~ 8 hrs. depend on battery quality
POWER REQUIRED	Battery AA - 2 X 1.5V	Battery AA - 2 X 1.5V	Battery AA - 2 X 1.5V
RECEIVER:	Single Channel System	Dual Channel System	Dual Channel System
AUDIO OUTPUT	Balanced 0-50mV Unbalanced HI: 0-80mV; LO: 0-25mV	Balanced 0-50mV Unbalanced HI: 0-80mV; LO: 0-25mV	Balanced 0-50mV Unbalanced HI: 0-80mV; LO: 0-25mV
FREQUENCY RESPONSE	50-16000Hz	50-16000Hz	50-16000Hz
POWER REQUIRED	240V AC 50Hz for Adapter	240V AC 50Hz for Adapter	240V AC 50Hz for Adapter
CONTROLS	Power ON/OFF Switch, Audio Output Volume Control for each channel	Power ON/OFF Switch, Audio Output Volume Control for each channel	Power ON/OFF Switch, Audio Output Volume Control for each channel
OPERATING RANGE (APPROX.)	50~ 100 Meters	50 ~ 100 Meters	50 ~150 Meters

PROFESSIONAL WIRELESS MICROPHONES



DWM-696H2-UHF



DWM-88U-UHF



UX-2H

SPECIFICATIONS	DWM-696H2-UHF	DWM-88U-UHF	UX-2H
MICROPHONE:	Hand Held Mic - Dual	Hand Held Mic - Single	Hand Held Mic - Dual
RF OUTPUT POWER	20mW (Max.)	20mW (Max.)	25mW
MODULATION MODE	FM (F3E) UHF	FM (F3E) VHF	UHF Quartz Controlled Fixed Frequency
MICROPHONE ELEMENT	Dynamic Cardioid	Dynamic Cardioid	Dynamic Super Cardioid
CARRIER FREQUENCY	700 ~ 800MHz	180 ~ 280MHz	UHF 520-930MHz
BATTERY LIFE	6 ~ 8 hrs. 3V Battery (AA)	6 ~ 8 hrs. 3V Battery (AA)	6 ~ 8 hrs. depend on battery quality Battery AA - 2 X 1.5V
RECEIVER:	Dual Channel System	Single Channel System	Dual Channel System
AUDIO OUTPUT	Combined CH. 0-5mV/1KΩ	Combined CH. 0-5mV/1KΩ	Balanced 0-50mV Unbalanced HI: 0-80mV; LO: 0-25mV
FREQUENCY RESPONSE	40Hz ~ 16KHz	40Hz ~ 16KHz	60-18000Hz (±3dB)
POWER REQUIRED	AC 220-240V 50/60Hz for AC Adapter	AC 220-240V 50/60Hz for AC Adapter	240V AC 50Hz for Adaptor
CONTROLS	Power ON/OFF Switch, Audio Output Volume Control for each channel	Power ON/OFF Switch, Audio Output Volume Control for each channel	Power ON/OFF Switch, Audio Output Volume Control for each channel
OPERATING RANGE (APPROX.)	30 ~ 80 Meters	30 ~ 50 Meters	50 ~ 100 Meters

DRIVER UNITS & DIAPHRAGMS



DU-60XT

SPECIFICATIONS	DU-60XT
INPUT POWER	60W RMS / 75W MAX
IMPEDANCE / POWER TAPS	5W / 10W / 20W / 40W / 60W
FREQUENCY RESPONSE	150Hz ~ 7000KHz
SPL at 1kHz	115 dB/1W/1m 132 dB/50W/1m
THROAT COUPLING	1-3/8" - 18T PI, Throat Couple No.1
DIMENSIONS	Ø150 X H144 mm
WEIGHT	2.5 Kg



DU-50XT



DU-60



DU-40

SPECIFICATIONS	DU-50XT	DU-60	DU-40
INPUT POWER	50W RMS / 60W MAX	60W RMS / 90W MAX	40W RMS / 60W MAX
IMPEDANCE / POWER TAPS	5W/10W/20W/30W/50W	16 Ω	16 Ω
FREQUENCY RESPONSE	150Hz ~ 7000KHz	150Hz ~ 7000KHz	150Hz ~ 7000KHz
SPL at 1kHz	113.5 dB/1W/1m 131 dB/50W/1m	115 dB/1W/1m 133 dB/60W/1m	113 dB/1W/1m 130 dB/40W/1m
THROAT COUPLING	1-3/8" - 18T PI, Throat Couple No.1	1-3/8" - 18T PI, Throat Couple No.1	1-3/8" - 18T PI, Throat Couple No.1
DIMENSIONS	Ø150 X H138 mm	Ø125 X H100 mm	Ø113 X H98 mm
WEIGHT	2.3 Kg	2.1 Kg	1.75 Kg


DRIVER UNIT DIAPHRAGMS



DU-50XT / 60XT



DU-40 / DU-60



DMH-520T

PA MUSIC HORN
HIGH FIDELITY SOUND



2 Way Woofer Tweeter Combination,
6" Kevlar cone woofer & 1" Phenolic Dome Tweeter

SPECIFICATIONS

INPUT POWER 50W

POWER TAPS 50/20/10/5W

FREQ. RESPONSE 100-16,000Hz

SPL at 1kHz 99dB/1W/1m, 115dB/50W/1m

DIMENSION W370 X H255 X D300

WEIGHT 6.5Kg

MATERIAL ABS (UV PROTECTED)




Ideal use for : Stadium, Airport, Railway Station, Bus Station, Education Institutions, Religious Places, Amusement Parks, Factories etc.

INSTALLATION - CEILING SPEAKERS



DCS-6630 FULL RANGE

SPECIFICATIONS	DCS-6630 - 6" Full Range
INPUT POWER	6W RMS
POWER TAPS ON 100V	3W / 6W
FREQUENCY RESPONSE	55 - 15000Hz
SPL AT 1kHz (1W/1m)	89dB



DCS-5520 COAXIAL

SPECIFICATIONS	DCS-5520 - 5"
INPUT POWER	20W RMS
POWER TAPS ON 100V	5W / 10W / 20W
FREQUENCY RESPONSE	50 - 16000Hz
SPL AT 1kHz (1W/1m)	88dB



DCS-6650 COAXIAL

SPECIFICATIONS	DCS-6650 - 6"
INPUT POWER	30W RMS
POWER TAPS ON 100V	7.5W / 15W / 30W
FREQUENCY RESPONSE	50 - 16000Hz
SPL AT 1kHz (1W/1m)	89dB



BLUETOOTH SPEAKER

CBT-500 Bluetooth Ceiling Speaker

SPECIFICATIONS	CBT-500 6" (1 PAIR SET)
INPUT POWER	30W RMS
CLASS D AMPLIFIER	15W + 15W
FREQUENCY RESPONSE	50 - 16000Hz
POWER SUPPLY	ADAPTOR 12V 2A



CBT-100 Bluetooth Ceiling Speaker

SPECIFICATIONS	CBT-100 6" (1 PAIR SET)
INPUT POWER	20W RMS
CLASS D AMPLIFIER	10W + 10W
FREQUENCY RESPONSE	50 - 16000Hz
POWER SUPPLY	ADAPTOR 12V 1A

INSTALLATION - WALL SPEAKERS



DWS-530B

SPECIFICATIONS	DWS-530B
INPUT POWER	30W RMS
POWER TAPS 100V	7.5/15/30W
SPEAKER, TWEETER	1X5" + TWEETER
FREQUENCY RESPONSE	60Hz~20kHz
SPL at (1W/1m)	88dB
NOMINAL IMPEDANCE	-
DIMENSION (mm)	W140 X D145 X H210

DWS-400T

SPECIFICATIONS	DWS-400T
INPUT POWER	20W RMS
POWER TAPS 100V	2.5/5/10/20W
SPEAKER, TWEETER	1 X 4" + TWEETER
FREQUENCY RESPONSE	100Hz~20kHz
SPL at (1W/1m)	89dB
NOMINAL IMPEDANCE	8Ω
DIMENSION (mm)	W170 X D150 X H215

DWS-500T

SPECIFICATIONS	DWS-500T
INPUT POWER	30W RMS
POWER TAPS 100V	3.75/7.5/15/30W
SPEAKER, TWEETER	1 X 5" + TWEETER
FREQUENCY RESPONSE	100Hz~20kHz
SPL at (1W/1m)	89dB
NOMINAL IMPEDANCE	8Ω
DIMENSION (mm)	W182X D162 X H242

DWS-600T

SPECIFICATIONS	DWS-600T
INPUT POWER	40W RMS
POWER TAPS 100V	5/10/20/40W
SPEAKER, TWEETER	1 X 6" + TWEETER
FREQUENCY RESPONSE	100Hz~20kHz
SPL at (1W/1m)	88dB
NOMINAL IMPEDANCE	8Ω
DIMENSION (mm)	W215 X D190 X H284

INSTALLATION - WALL SPEAKERS



DWS-705T

SPECIFICATIONS	DWS-705T
INPUT POWER	60W RMS
POWER TAPS 100V	30/20/10W
SPEAKER, TWEETER	1X5" + TWEETER
FREQUENCY RESPONSE	65Hz~20KHz
SPL at (1W/1m)	88dB
NOMINAL IMPEDANCE	8Ω
DIMENSION (mm)	—

DWS-800T

SPECIFICATIONS	DWS-800T
INPUT POWER	80W RMS
POWER TAPS 100V	60/30/15/7.5W
SPEAKER, TWEETER	1X8" + TWEETER
FREQUENCY RESPONSE	55Hz~20KHz
SPL at (1W/1m)	90dB
NOMINAL IMPEDANCE	8Ω
DIMENSION (mm)	—

CLASS-D AMPLIFIER WITH BLUETOOTH



SPECIFICATIONS

D-152

INPUT	BLUETOOTH INPUT
OUTPUT	30W RMS
CHANNELS	2 X 15W
POWER SUPPLY	DC 12V - 2A



SPECIFICATIONS

D-154

INPUT	BLUETOOTH INPUT
OUTPUT	60W RMS
CHANNELS	4 X 15W
POWER SUPPLY	DC 12V - 4A



SPECIFICATIONS

D-302

INPUT	BLUETOOTH INPUT
OUTPUT	60W RMS
CHANNELS	2 X 30W
POWER SUPPLY	DC 12V - 4A



SPECIFICATIONS

D-304

INPUT	BLUETOOTH INPUT
OUTPUT	120W RMS
CHANNELS	4 X 30W
POWER SUPPLY	DC 12V - 6A

INSTALLATION - COLUMN SPEAKERS & EQUIPMENT



ZONE SELECTOR

SPECIFICATIONS	ZS-16	ZS-10	ZS-5
INPUT	1X100V	1X100V	1X100V
OUTPUT 100V	16X100V	10X100V	5X100V
ALL CALL SWITCH	AVAILABLE		
INDICATOR	LED on All Channel		
POWER SUPPLY	AC: 230V 50Hz DC: 24V		

LINE CONVERTER 100V

SPECIFICATIONS	LC-100
INPUT	100V
OUTPUT	200mV/1V
POWER SUPPLY	AC: 230V 50Hz



**SOUND COLUMN
DSC-15T**



**SOUND COLUMN
DSC-10T**

SPECIFICATIONS	SOUND COLUMN DSC-15T	SOUND COLUMN DSC-10T
INPUT POWER	15W - 2- 6" X 4"	10W - 1- 6" X 4"
POWER TAPS ON 100V	5W / 7.5W / 15W	5W / 7.5W / 10W
FREQUENCY RESPONSE	150 - 10000Hz	150 - 10000Hz
SPL AT 1kHz (1W/1m)	92dB	92dB

DJ - ACTIVE CROSSOVER & DISTRIBUTOR




Distribution Pre-Amplifier **DA-202**



3 Way Stereo + Subwoofer Crossover **LX-300**

SPECIFICATIONS	DA-202
INPUT	10 Stereo / 20 Mono
INPUT IMPEDANCE	20K OHMS (6.3 PHONO JACK)
OUTPUT IMPEDANCE	60 OHMS (6.3 PHONO JACK)
FREQUENCY	10Hz ~ 35kHz
POWER SUPPLY	AC 220V 50Hz

SPECIFICATIONS	LX-300
INPUT CONNECTORS	XLR
FREQUENCY RESPONSE	20Hz to 20kHz ± 1dB
Low/Mid Crossover	120Hz
Mid/High Crossover	2.5 kHz
POWER SUPPLY	AC 220V 50Hz

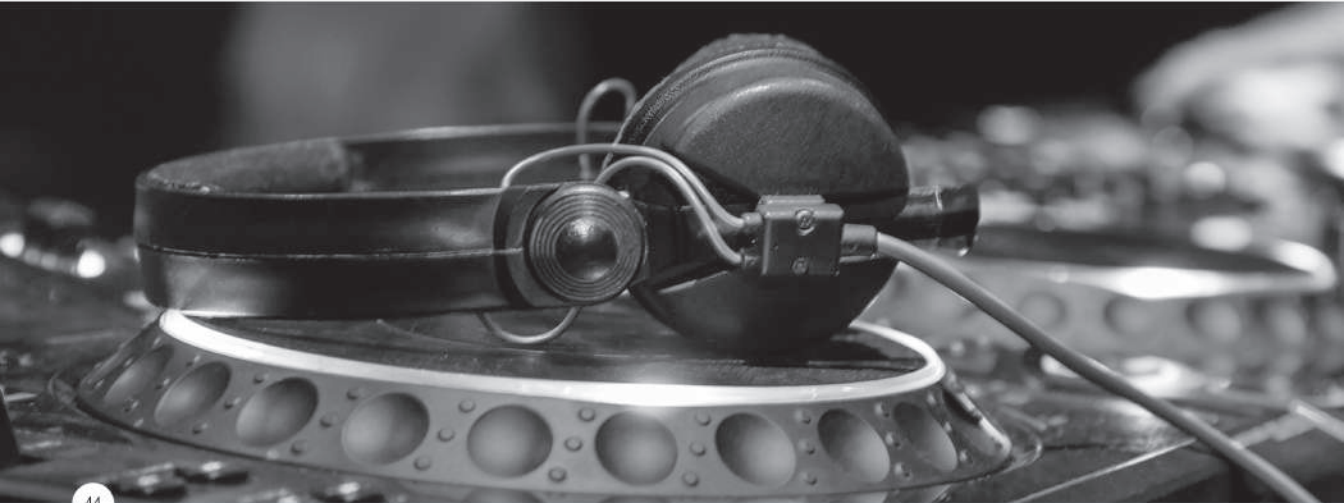

PA PORTABLE & GUITAR AMPLIFIER



CUBE-30BW



CUBE-35BW



CUBE-50BW



SPECIFICATIONS	CUBE-30BW	CUBE-35BW	CUBE-50BW
OUTPUT POWER	30W	35W	40W
MICROPHONE INPUTS	WIRELESS MIC-1/ WIRED MIC-2	WIRELESS MIC-1/ WIRED MIC-2	WIRELESS MIC-1/ WIRED MIC-2
OTHER INPUTS	AUX (FOR CD / KEYBOARD / INSTRUMENTS)	AUX (FOR CD / KEYBOARD / INSTRUMENTS)	AUX (FOR CD / KEYBOARD / INSTRUMENTS)
DIGITAL PLAYER	MP3 / BT / LINE IN / FM	MP3 / BT / LINE IN / FM	MP3 / BT / LINE IN / FM
OUTPUTS	HEADPHONE / LINE	HEADPHONE / LINE	HEADPHONE / LINE
ECHO EFFECT	DIGITAL ECHO EFFECT	DIGITAL ECHO EFFECT	DIGITAL ECHO EFFECT
SPEAKER SIZE	8"	8" Coaxial	10"
EXTERNAL SPEAKER CONNECTION	AVAILABLE	AVAILABLE	AVAILABLE
POWER SUPPLY	AC 220-240V 50/60Hz / IN-BUILT RECHARGABLE BATTERY / EXTERNAL 12V BATTERY	AC 220-240V 50/60Hz / IN-BUILT RECHARGABLE BATTERY / EXTERNAL 12V BATTERY	AC 220-240V 50/60Hz / IN-BUILT RECHARGABLE BATTERY / EXTERNAL 12V BATTERY

PA PORTABLE-CLASSMATE Series



SPECIFICATIONS	CUBE-15GT
POWER OUTPUT	15W
INPUT	Guitar in , MIC, AUX
DIGITAL PLAYER	Built-in Digital Player with SD/MMC/USB Bluetooth & FM Input with LED Display
TONE CONTROLS	Bass, Mid, Treble, Echo, delay, Mic Distortion, Tone, Guitar/AUX, USB
OUTPUTS	Phones
POWER SUPPLY	AC: 220-240V 50/60Hz



SPECIFICATIONS	CUBE-25GT
POWER OUTPUT	25W
INPUT	Guitar in , MIC, AUX
DIGITAL PLAYER	Built-in Digital Player with SD/MMC/USB Bluetooth & FM Input with LED Display
TONE CONTROLS	Bass, Mid, Treble, Echo, delay, Mic Distortion, Tone, Guitar/AUX, USB
OUTPUTS	Phones
POWER SUPPLY	AC: 220-240V 50/60Hz



SPECIFICATIONS	CLASSMATE CM-10
OUTPUT POWER	10W
DRIVER	6" X 4" SPEAKER
MICROPHONE	UHF WIRELESS BODY PACK + HEAD MIC
INPUT	BLUETOOTH
EFFECT	ECHO EFFECT
POWER REQUIREMENT	AC: 220-240V 50/60Hz



SPECIFICATIONS	CLASSMATE CM-20
OUTPUT POWER	20W
DRIVER	8" + TWEETER
MICROPHONE	Dual UHF WIRELESS (HAND + HEAD MIC)
EFFECT	ECHO EFFECT
DIGITAL PLAYER	Digital Player + USB+ Bluetooth+ Recorder+FM
POWER REQUIREMENT	AC: 220-240V 50/60Hz



POWERED PA SPEAKER SYSTEMS



AS-301



AS-304



AS-302



SPECIFICATIONS	AS-301	AS-302	AS-304
OUTPUT POWER	200W	200W	400W
MICROPHONE INPUTS	WIRELESS MIC-2 UHF	WIRELESS MIC-2 UHF	WIRELESS MIC-2 UHF
INPUTS	6 CHANNEL MICROPHONE IN-BUILT MIXER WITH BASS/MID/TREBLE	6 CHANNEL MICROPHONE IN-BUILT MIXER WITH BASS/MID/TREBLE	6 CHANNEL MICROPHONE IN-BUILT MIXER WITH BASS/MID/TREBLE
DIGITAL PLAYER	MP3 / BT / LINE IN / FM	MP3 / BT / LINE IN / FM	MP3 / BT / LINE IN / FM
OUTPUTS	HEADPHONE / LINE	HEADPHONE / LINE	HEADPHONE / LINE
ECHO EFFECT	DIGITAL ECHO EFFECT	DIGITAL ECHO EFFECT	DIGITAL ECHO EFFECT
SPEAKER SIZE	12"	12"	12"
EXTERNAL SPEAKER CONNECTION	—	AVAILABLE	AVAILABLE
POWER SUPPLY	AC 220-240V 50/60Hz	AC 220-240V 50/60Hz	AC 220-240V 50/60Hz



Lets Tune the music !



PROFESSIONAL SPEAKERS

PROFESSIONAL SPEAKERS & WOOFERS 21" & 18"



V21-3000

VOLVO



PB21-3000



V21-2500

VOLVO



C21-3000

CARBON CONE



21-3000 XB



NEO21-3000



SPECIFICATIONS	V21-3000	PB21-3000	V21-2500	C21-3000	21-3000 XB	NEO21-3000
SIZE	21 inch	21 INCH	21 inch	21 inch	21 inch	21 inch
POWER RATING	3000W RMS	3000W RMS	2500W RMS	3000W RMS	3000W RMS	3000W RMS
IMPEDANCE	8 Ω	8 Ω	8 Ω	8 Ω	8 Ω	8 Ω
SENSITIVITY	97 dB	97 dB	97 dB	97 dB	97 dB	97 dB
FREQUENCY TYPE	BASS	BASS	BASS	BASS	BASS	BASS
VOICE COIL	6"	6"	5.5"	6"	6"	6"
MAGNET SIZE	(330x170x18mm)x2	330mm	(280x20mm)x2	(330x170x30mm)	(330x170x18mm)x2	NEODYMIUM
BASKET	ALUMINIUM	ALUMINIUM	ALUMINIUM	ALUMINIUM	ALUMINIUM	ALUMINIUM

PROFESSIONAL SPEAKERS & WOOFERS 18"



V18-2400



PB18-2000



**C18-2500
CARBON CONE**



LF18-2500

SPECIFICATIONS	V18-2400	PB18-2000	C18-2500	LF18-2500
SIZE	18 inch	18 inch	18 inch	18 inch
POWER RATING	2400W RMS	2000W RMS	2500W RMS	2500W RMS
IMPEDANCE	8 Ω	8 Ω	8 Ω	8 Ω
SENSITIVITY	98 dB	97 dB	98 dB	98 dB
FREQUENCY TYPE	BASS	BASS	BASS	BASS
VOICE COIL	5"	5"	5"	6"
MAGNET SIZE	280x25mm	280x25mm	280x30mm	330x170x30mm
BASKET	ALUMINIUM	ALUMINIUM	ALUMINIUM	ALUMINIUM

PROFESSIONAL SPEAKERS & WOOFERS 21" & 18"



RCS18-1500



TBW18-1000



TC18-3000



RCS18-451DS



LF-1850



RCS18-1000



18-1000XB

SPECIFICATIONS	RCS18-1500	TBW18-1000	TC18-3000	RCS18-451DS	LF-1850	RCS18-1000	18-1000XB
SIZE	18 inch	18 inch	18 inch	18 inch	18 inch	18 inch	18 inch
POWER RATING	1500W RMS	1000W RMS	1800W RMS	1800W RMS	1200W RMS	1000W RMS	1000W RMS
IMPEDANCE	8 Ω	8 Ω	8 Ω	8 Ω	8 Ω	8 Ω	8 Ω
SENSITIVITY	99 dB	99 dB	99 dB	99 dB	97 dB	98 dB	96 dB
FREQUENCY TYPE	BASS	BASS	BASS	BASS	BASS	BASS	BASS
VOICE COIL	5"	4" DUAL	4" DUAL	4.5"	5"	4"	4"
MAGNET SIZE	280mm	220mm	220mm	245mm	253mm	220mm	220mm
BASKET	ALUMINIUM	ALUMINIUM	ALUMINIUM	ALUMINIUM	ALUMINIUM	ALUMINIUM	ALUMINIUM

PROFESSIONAL SPEAKERS - RED SERIES



RD18-2000



RD18-2000C



RD18-1000



RD15-800



RD12-400



SPECIFICATIONS	RD18-2000	RD18-2000C	RD18-1000	RD15-800	RD12-400
SIZE	18INCH	18INCH	18INCH	15INCH	12INCH
POWER RATING	2000W RMS	2000W RMS	1000Q RMS	800W RMS	400W RMS
IMPEDANCE	8 Ω	8 Ω	8 Ω	8 Ω	8 Ω
SENSITIVITY	99 dB	99 dB	97 dB	96 dB	96 dB
FREQUENCY TYPE	BASS	BASS	MID-BASS	MID-BASS	MID
VOICE COIL	5"	5"	4"	4"	3"
MAGNET SIZE	282*159*25	282*159*25			
BASKET	ALUMINIUM	ALUMINIUM	ALUMINIUM	ALUMINIUM	ALUMINIUM

PROFESSIONAL SPEAKERS & WOOFERS 15"



S15-700



S15-500



S15-450



15-800XB



LF-1560



15-600XB



V15-400



R15-450DX



V15-1000

SPECIFICATIONS	S15-700	S15-500	S15-450	15-800XB	LF-1560	15-600XB	V15-400	R15-450DX	V15-1000
SIZE	15 inch	15 inch	15 inch	15 inch	15 inch	15 inch	15 inch	15 inch	15 inch
POWER RATING	700W RMS	500W RMS	450W RMS	800W RMS	600W RMS	600W RMS	400W RMS	450W RMS	1000W RMS
IMPEDANCE	8 Ω	8 Ω	8 Ω	8 Ω	8 Ω	8 Ω	8 Ω	8 Ω	8 Ω
SENSITIVITY	96 dB	97 dB	98 dB	96 dB	97 dB	96 dB	96 dB	100 dB	98 dB
FREQUENCY TYPE	BASS	LOW-MID	MID	BASS	BASS	BASS	BASS	MID-BASS	BASS
VOICE COIL	4"	3.5"	3"	4"	4"	4"	3"	3"	4"
MAGNET SIZE	220mm	200mm	200mm	220mm	220mm	220mm	200mm	200mm	220mm
BASKET	ALUMINIUM	ALUMINIUM	ALUMINIUM	ALUMINIUM	ALUMINIUM	ALUMINIUM	ALUMINIUM	ALUMINIUM	ALUMINIUM



**15-350XB
JAMBOO**



**15-350XB
RAMBOO**



B15-400



L15-350MBS



**15-400XB
RAMBOO**



FM15-351



ETR15-350S



15-300MBS



15-200FRS

15-350XB JAMBO	15-350XB RAMBO	B15-400	L15-350MBS	15-400XB RAMBOO	FM15-351	ETR15-350S	15-300MBS	15-200FRS
15 inch	15 inch	15 inch	15 inch	15 inch	15 inch	15 inch	15 inch	15 inch
350W RMS	350W RMS	400W RMS	350W RMS	400W RMS	650W RMS	350W RMS	250W-350W RMS	200W RMS
8 Ω	8 Ω	8 Ω	8 Ω	8 Ω	8 Ω	8 Ω	8 Ω	8 Ω / 16 Ω
99 dB	99 dB	97 dB	96 dB	99 dB	97 dB	99 dB	97 dB	98 dB
MID-BASS	MID-BASS	MID BASS	MID-BASS	MID-BASS	BASS	MID-BASS	MID-BASS	FULL RANGE
3"	3"	3"	3"	3"	3.5"	3"	2"	2"
190mm	190mm	200mm	190mm	200mm	200mm	200mm	180mm	156mm
ALUMINIUM	ALUMINIUM	ALUMINIUM	STEEL	ALUMINIUM	ALUMINIUM	STEEL	STEEL	STEEL

PROFESSIONAL SPEAKERS & WOOFERS 12"



12-200MB



12-200MH-XT



12-200FR-XT



L12-200MBS



L12-200FRS




12-150FRS



ETR12-120S



12-100FRS

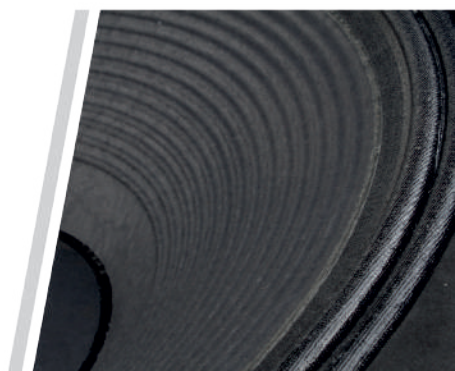

SPECIFICATIONS	12-200MB	12-200MH-XT	12-200FR-XT	L12-200MBS	L12-200FRS	12-150FRS	ETR12-120S	12-100FRS
SIZE	12 inch	12 inch	12 inch	12 inch	12 inch	12 inch	12 inch	12 inch
POWER RATING	200W RMS	200W RMS	200W RMS	200W RMS	200W RMS	150W RMS	120W RMS	100W RMS
IMPEDANCE	8 Ω	8 Ω	8 Ω	8 Ω	8 Ω	8 Ω	8 Ω / 16 Ω	8 Ω / 16 Ω
SENSITIVITY	96 dB	97 dB	98 dB	97 dB	96 dB	98 dB	99 dB	98 dB
FREQUENCY TYPE	MID-BASS	MID-HI	FULL RANGE	MID-BASS	FULL RANGE	FULL RANGE	FULL RANGE	FULL RANGE
VOICE COIL	2"	2"	2"	2"	2"	1.75"	1.5"	1.5"
MAGNET SIZE	156mm	156mm	156mm	156mm	156mm	156mm	135mm	135mm
BASKET	ALUMINIUM	ALUMINIUM	ALUMINIUM	STEEL	STEEL	STEEL	STEEL	STEEL



ETR12-250S



ETR12-200S



MB12-300



J12-800



J12-600



MB12-400

LINE ARRAY SPEAKER 12"



ETR 12-400



FM 12-400



J12-400

SPECIFICATIONS	ETR12-250S	ETR12-200S	MB12-300	J12-800	J12-600	MB12-400	ETR 12-400	FM 12-400	J12-400
SIZE	12 inch	12 inch	12 inch	12 Inch	12 Inch	12 inch	12 inch	12 inch	12 Inch
POWER RATING	250W RMS	200W RMS	300W RMS	800W RMS	600W RMS	400W RMS	400W RMS	400W RMS	400W RMS
IMPEDANCE	8 Ω	8 Ω	8 Ω	8 Ω	8 Ω	8 Ω	8 Ω	8 Ω	8 Ω
SENSITIVITY	97 dB	97 dB	96 dB	97 dB	97 dB	96 dB	95 dB	97 dB	97 dB
FREQUENCY TYPE	MID BASS	MID BASS	MID BASS	BASS	LOW MID	MID BASS	MID BASS	MID BASS	MID-BASS
VOICE COIL	2.5"	2"	3"	4"	3"	3"	3"	3"	3"
MAGNET SIZE	156mm	156mm	190mm	220mm	200mm	190mm	190mm	190mm	190mm
BASKET	STEEL	STEEL	ALUMINIUM	ALUMINIUM	ALUMINIUM	ALUMINIUM	STEEL	ALUMINIUM	ALUMINIUM

PROFESSIONAL SPEAKERS - NEODYMIUM



NEO 12-600



NEO 12-400



NEO 15-351



NEO 18-451LF



SPECIFICATIONS	NEO 12-600	NEO 12-400	NEO 15-351	NEO 18-451LF
SIZE	12 inch	12 inch	15 inch	18 inch
POWER RATING	600W RMS	400W RMS	650W RMS	2000W RMS
IMPEDANCE	8 Ω	8 Ω	8 Ω	8 Ω
SENSITIVITY	99 dB	99 dB	99 dB	98 dB
FREQUENCY TYPE	MID BASS	MID BASS	MID BASS	BASS
VOICE COIL	3.5"	3"	3.5"	4.5"
MAGNET SIZE	NEODYMIUM MAGNET	NEODYMIUM MAGNET	NEODYMIUM MAGNET	NEODYMIUM MAGNET
BASKET	ALUMINIUM	ALUMINIUM	ALUMINIUM	ALUMINIUM

NEO



DJ & PA SPEAKER SYSTEMS



DRX-120



**DRX-012
DRX-112**



**DRX-250P
DRX-250N**

SPECIFICATIONS	DRX-120	DRX-012	DRX-112	DRX-250P
INPUT POWER	100W RMS	120W RMS	150W RMS	250W RMS
CONFIGURATION	2 WAY	2 WAY	2 WAY	2 WAY
LOW FREQUENCY SPEAKER	1 X 12"	1 X 12"	1 X 12"	2 X 12"
HI FREQUENCY DRIVER	PIEZO	PIEZO	PIEZO	PIEZO
SPL at (1W/1m)	98dB	98dB	98dB	100dB
NOMINAL IMPEDANCE	8Ω	8Ω	8Ω	8Ω



DRX-300B



DRX-212



DP-6012

SPECIFICATIONS	DRX-250N	DRX-300B	DRX-212	DP-6012
INPUT POWER	250W RMS	300W RMS	300W RMS	400W RMS
CONFIGURATION	2 WAY	2 WAY	2 WAY	2 WAY
LOW FREQUENCY SPEAKER	2 X 12"	2 X 12"	2 X 12"	1 X 12"
HI FREQUENCY DRIVER	NEO	NEO	NEO	COMPRESSION
SPL at (1W/1m)	101dB	101dB	101dB	101dB
NOMINAL IMPEDANCE	8Ω	4Ω	4Ω	8Ω



DRX-350B



DRX-320B



DRX-220

SPECIFICATIONS	DRX-350B	DRX-320B	DRX-220
INPUT POWER	400W RMS	300W RMS	200W RMS
CONFIGURATION	2 WAY	2 WAY	2 WAY
LOW FREQUENCY SPEAKER	2 X 12"	1 X 15"	1 X 15"
HI FREQUENCY DRIVER	COMPRESSION	COMPRESSION	PIEZO
SPL at (1W/1m)	101dB	100dB	99dB
NOMINAL IMPEDANCE	4Ω	8Ω	8Ω



DRX-110



DRX-115



**DRX-500
DRX-600**

SPECIFICATIONS	DRX-110	DRX-115	DRX-500	DRX-600
INPUT POWER	50W RMS	300W RMS	500W RMS	600W RMS
CONFIGURATION	1 WAY	2 WAY	2 WAY	2 WAY
LOW FREQUENCY SPEAKER	1 X 10"	1 X 15"	2 X 15"	2 X 15"
HI FREQUENCY DRIVER	–	COMPRESSION	COMPRESSION	COMPRESSION
SPL at (1W/1m)	99dB	100dB	100dB	100dB
NOMINAL IMPEDANCE	8Ω	8Ω	8Ω	4Ω

DJ & PA SPEAKER SYSTEMS



DRX-625
DRX-650 (PAINT)



DRX-725
DRX-750 (PAINT)



DRX-825
DRX-850 (PAINT)

SPECIFICATIONS	DRX-625	DRX-650 (PAINT)	DRX-725	DRX-750 (PAINT)	DRX-825	DRX-850 (PAINT)
INPUT POWER	700W RMS	700W RMS	700W RMS	750W RMS	800W RMS	800W RMS
CONFIGURATION	2 WAY	2 WAY	2 WAY	2 WAY	2 WAY	2 WAY
LOW FREQUENCY SPEAKER	2 X 15"	2 X 15"	2 X 15"	2 X 15"	2 X 15"	2 X 15"
HI FREQUENCY DRIVER	COMPRESSION	COMPRESSION	COMPRESSION	COMPRESSION	COMPRESSION	COMPRESSION
SPL at (1W/1m)	101dB	101dB	101dB	101dB	101dB	101dB
NOMINAL IMPEDANCE	4Ω	4Ω	4Ω	4Ω	4Ω	4Ω



DRX-1200
DRX-1250 (PAINT)



DRX-1600
DRX-1650 (PAINT)

SPECIFICATIONS	DRX-1200	DRX-1250 (PAINT)	DRX-1600	DRX-1650 (PAINT)
INPUT POWER	1200W RMS	1200W RMS	1600W RMS	1600W RMS
CONFIGURATION	2 WAY	2 WAY	2 WAY	2 WAY
LOW FREQUENCY SPEAKER	2 X 15"	2 X 15"	2 X 15"	2 X 15"
HI FREQUENCY DRIVER	COMPRESSION	COMPRESSION	COMPRESSION	COMPRESSION
SPL at (1W/1m)	101dB	101dB	101dB	101dB
NOMINAL IMPEDANCE	4Ω	4Ω	4Ω	4Ω



DRX-118



DRX-118 PAINT



DRX-121



**DRX-218
DRX-218 PAINT**

SPECIFICATIONS	DRX-118	DRX-118 (PAINT)	DRX-121	DRX-218	DRX-218 (PAINT)
INPUT POWER	1000W RMS	1000W RMS	3000W RMS	2000W RMS	2000W RMS
CONFIGURATION	1 WAY	1 WAY	1 WAY	1 WAY	1 WAY
LOW FREQUENCY SPEAKER	1 x 18"	1 x 18"	1 x 21"	2 x 18"	2 x 18"
SPL at (1W/1m)	101dB	101dB	101dB	101dB	101dB
NOMINAL IMPEDANCE	8Ω	8Ω	8Ω	8Ω	8Ω

DJ & PA SPEAKER SYSTEMS



DRX-2150




LA-1000




SCOOP-118

SPECIFICATIONS	DRX-2150	LA-1000	SCOOP-118
INPUT POWER	1000W RMS	1000W RMS	1000W RMS
CONFIGURATION	2 WAY	2 WAY	BASS
LOW FREQUENCY SPEAKER	2 X 15"	2 X 12" NEO	1 X 18"
HI FREQUENCY DRIVER	COMPRESSION	COMPRESSION	-----
SPL at (1W/1m)	100dB	100dB	100dB
NOMINAL IMPEDANCE	4Ω	8Ω	8Ω

HF COMPRESSION DRIVERS

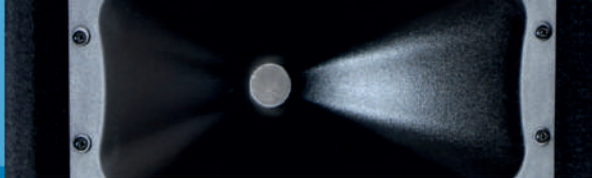


SPECIFICATIONS	NEO-300	DJP-26D	HF-D440	HF-D540	HF-D1010	HF-D800	HPD-4580
POWER RATING	30W	40W	50W	80W	100W	80W	80W
IMPEDANCE	8 Ω	8 Ω	8 Ω	8 Ω	8 Ω	8 Ω	8 Ω
SENSITIVITY	107 dB	108 dB	108 dB	108 dB	108 dB	108 dB	108 dB
FREQUENCY RANGE	1.5 KHz ~ 18KHz	1.5 KHz ~ 20KHz	1.5 KHz~ 20KHz	1.5 KHz~ 20KHz	1.5 KHz~ 20KHz	1.5 KHz~ 20KHz	1.5 KHz~ 20KHz
VOICE COIL	25.4 MM	25.4 MM	44.4 MM	51.6 MM	75 MM	44.4 MM	44.4 MM
MOUNTING TYPE	Screw on 1-3/8"	Screw on 1-3/8"	Screw on 1-3/8"	Screw on 1-3/8"	Bolt on	Bolt on	Bolt on

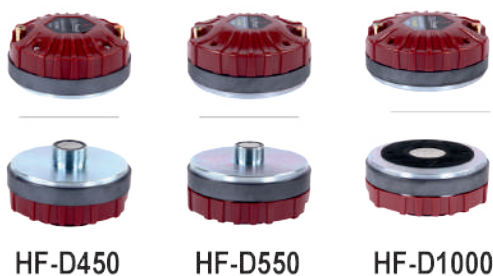

SPECIFICATIONS	HF-D450	HF-D550	HF-D1000
POWER RATING	50W	80W	100W
IMPEDANCE	8	8	8
SENSITIVITY	108 dB	108 dB	108 dB
FREQUENCY RANGE	1.5 KHz~ 20KHz	1.5 KHz~ 20KHz	1.5 KHz~ 20KHz
VOICE COIL	44.4 MM	51.6 MM	75 MM
MOUNTING TYPE	Screw on 1-3/8"	Screw on 1-3/8"	Bolt on

COMPRESSION DRIVERS - DIAPHRAGM



DIAPHRAGM	VOICE COIL SIZE
NEO-30	25.4 mm
DJP-26D	25.4 mm
HF-D350	34.4 mm
HF-D450	44.4 mm
BM-D500	44.4 mm
HF-D550	51.6 mm
HF-D1000	72.2 mm

TWEETERS



DHT-200N / BM-D200

DHT-100P / PZ-100

SPECIFICATIONS	DHT-200N / BM-D200	DHT-100P / PZ-100
POWER CAPACITY	30W RMS	20W RMS
IMPEDENCE / POWER TAPS	8 Ω	-
FREQUENCY RESPONSE	1.5kHz ~ 18kHz	1.8kHz ~ 20kHz
SPL at 1kHz	107dB	93 dB
VOICE COIL	25.4 mm	PIEZO ELEMENT
DIMENSIONS	W188 X H78 X D113D mm	W188 X H78 X D113D mm


HF COMPRESSION DRIVERS




SPECIFICATIONS	HMD-2001 NEO	HMD-2002 FERRITE
POWER RATING	230W	230W
IMPEDANCE	8 Ω	8 Ω
SENSITIVITY	118dB	118dB
FREQUENCY RANGE	300-22KHz	300-22KHz
HIGH FREQUENCY RANGE	6000-22000Hz	6000-22000Hz
MIDDLE FREQUENCY RANGE	300-7000Hz	300-7000Hz
VOICE COIL HIGH-RANGE	1.75 in	1.75 in
VOICE COIL MID-RANGE	3.5 in	3.5 in
DIAPHRAGM MATERIAL	POLYESTER	POLYESTER
MOUNTING TYPE	4 x M6 holes	4 x M6 holes

SPECIFICATIONS	D-1001	HF-D7500	HF-J100	MD-1501	DMD2020	DMD-6060
POWER RATING	100W	110W	150W	150W	400W	600W
IMPEDANCE	8	8	8	8	8	8
SENSITIVITY	108 dB	108 dB	114 dB	115 dB	123 dB	138.5 dB
FREQUENCY RANGE	1.5 KHz~ 20KHz	1.2 KHz~ 20KHz	1.5 KHz~ 20KHz	200 hz~ 9KHz	200 hz~ 9KHz	300 hz~ 7KHz
VOICE COIL	75 MM	74.4 MM	100 MM	89.9 MM	(89.9 MM)x2	(125MM)x2
MOUNTING TYPE	Bolt ON	Bolt ON	Bolt on	Bolt on	Bolt on	Bolt on


CROSSOVER NETWORK




NW-400

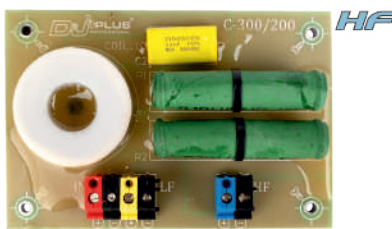


C-300/200



CX-40

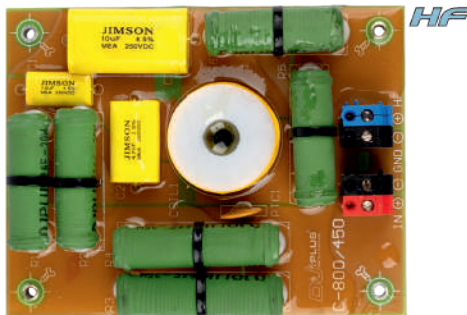


C-800/450

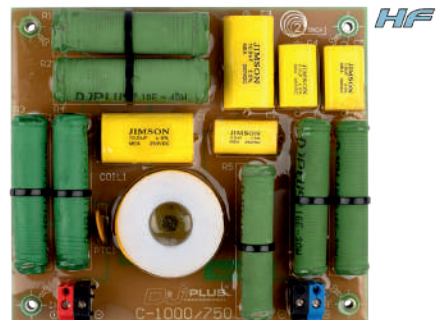


C-1000/750


SPECIFICATIONS	NW-400	C-300/200	CX-40	C-800/450	C-1000/750
POWER CAPACITY	20W	30W	30W~40W	50W	100W
CROSSOVER FREQUENCY	4 kHz	4 kHz	2.5 kHz	2.5 kHz	1.2 kHz
NOMINAL IMPEDANCE	8 Ω	8 Ω	8 Ω	8 Ω	8 Ω
HI PASS FILTER SLOPE	18 dB/Octave	12 dB/Octave	18 dB/Octave	18 dB/Octave	18 dB/Octave
LOW PASS FILTER SLOPE	-	-	-	-	-



C-350/200




C-350/450




C-500/450

SPECIFICATIONS	C-350/200	C-350/450	C-500/450
POWER CAPACITY	350W	350W	500W
CROSSOVER FREQUENCY	4 kHz	2 kHz	2.5 kHz
NOMINAL IMPEDANCE	8 Ω	8 Ω	8 Ω
HI PASS FILTER SLOPE	12 dB/Octave	12 dB/Octave	12 dB/Octave
LOW PASS FILTER SLOPE	12 dB/Octave	18 dB/Octave	18 dB/Octave

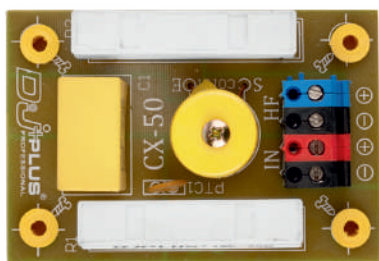


HF

CX-50




HF

CX-60



HF

CX-100



C-600/450




C-500/750




C-600/750

SPECIFICATIONS	CX-50	CX-60	CX-100	C-500/750	C-600/450	C-600/750
POWER CAPACITY	40W~50W	50W~80W	100W	500W	600W	600W
CROSSOVER FREQUENCY	4 kHz	2.5 kHz	1.2 kHz	1.2 kHz	2.5 kHz	1.2 kHz
NOMINAL IMPEDANCE	8 Ω	8 Ω	8 Ω	8 Ω	4 Ω	4 Ω
HI PASS FILTER SLOPE	18 dB	24 dB	24 dB	12 dB/Octave	12 dB/Octave	12 dB/Octave
LOW PASS FILTER SLOPE	-	-	-	18 dB/Octave	18 dB/Octave	18 dB/Octave



C-1000/450SX2



C-1000/750SX2




LF

C-650SW


SPECIFICATIONS	C-1000/450SX2	C-1000/750SX2	C-650SW
POWER CAPACITY	1000W	1000W	650W
CROSSOVER FREQUENCY	2.5 kHz	1.2 kHz	250 Hz
NOMINAL IMPEDANCE	4 Ω	4 Ω	8 Ω
HI PASS FILTER SLOPE	12 dB/Octave	12 dB/Octave	-
LOW PASS FILTER SLOPE	18 dB/Octave	18 dB/Octave	12 dB/Octave

CROSSOVER NETWORK

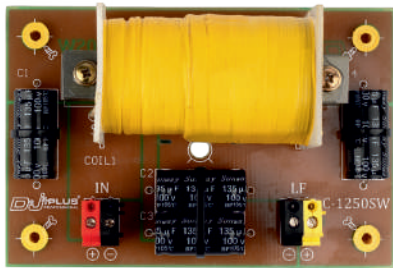


LF

C-1250SW

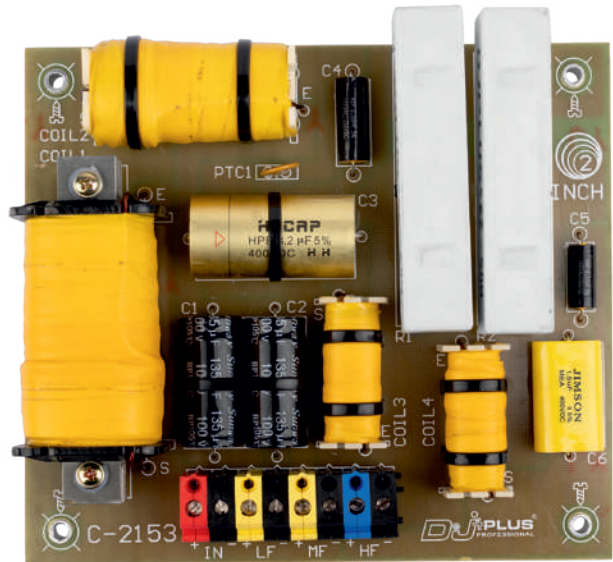


C-2153

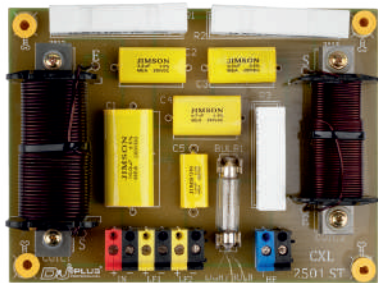


CXL-2501ST

SPECIFICATIONS	C-1250SW	CXL-2501ST	C-2153
POWER CAPACITY	1200W	700W + 60W	400W + 400W + 50W~100W
CROSSOVER FREQUENCY	150Hz	2.5 kHz	1.8 kHz
NOMINAL IMPEDANCE	8 Ω	4 Ω	4 Ω
HI PASS FILTER SLOPE	-	18 dB	24 dB
LOW PASS FILTER SLOPE	12 dB	12 dB	12 dB




HF

CXL-500



HF

CXL-750

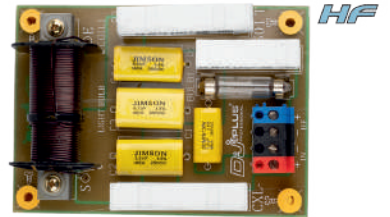

HF

CXL-501T


SPECIFICATIONS	CXL-500	CXL-750	CXL-501T
POWER CAPACITY	60W	100W	50W
CROSSOVER FREQUENCY	2.5 kHz	1.5 kHz	2.5 kHz
NOMINAL IMPEDANCE	8 Ω	8 Ω	8 Ω
HI PASS FILTER SLOPE	18 dB/Octave	18 dB	18 dB
LOW PASS FILTER SLOPE	-	-	-




CX-800



CX-600




LAC-1000

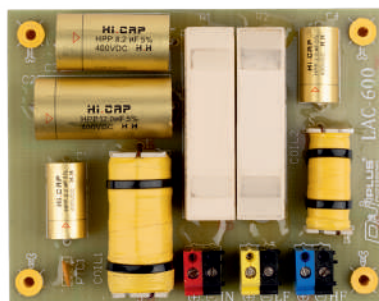

LAC-600

**LINE ARRAY
CROSSOVER**

SPECIFICATIONS	CX-600	CX-800	LAC-1000 FOR LINE ARRAY	LAC-600 FOR LINE ARRAY
POWER CAPACITY	600W + 50W~100W	400W+ 400W + 50W~100W	400W + 400W + 100W	400W + 100W
CROSSOVER FREQUENCY	1.8 kHz	1.8 kHz	1.5 kHz	1.2 kHz
NOMINAL IMPEDANCE	8 Ω	4 Ω	4 Ω	8 Ω
HI PASS FILTER SLOPE	24 dB	24 dB	24 dB	24 dB
LOW PASS FILTER SLOPE	12 dB	12 dB	12 dB	12 dB



CXM-115

**STAGE
MONITOR**




CXM-215




CXL-600/500

SPECIFICATIONS	CXM-115	CXM-215	CXL-600/500
POWER CAPACITY	600W + 100W	600W+600W + 100W	600W + 80W
CROSSOVER FREQUENCY	1.5 kHz	1.5 kHz	2.5 kHz
NOMINAL IMPEDANCE	8 Ω	4 Ω	4 Ω
HI PASS FILTER SLOPE	24 dB	24 dB	18 dB
LOW PASS FILTER SLOPE	12 dB	12 dB	12 dB

CROSSOVER NETWORK

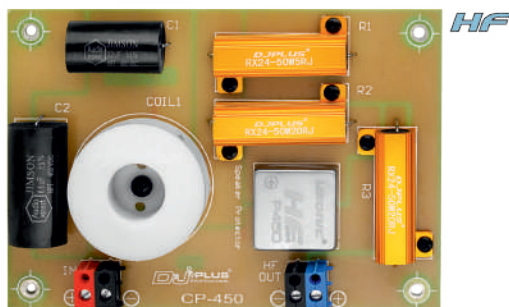

CP-450

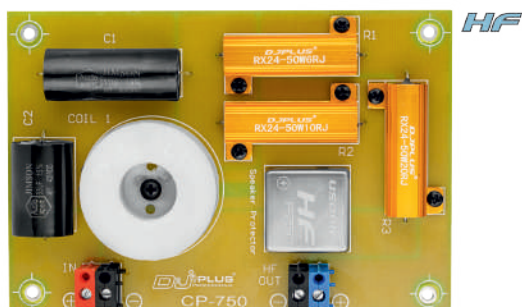

CP-750

SPECIFICATIONS

POWER CAPACITY

CP-450

50W

CROSSOVER FREQUENCY

2.5 kHz

NOMINAL IMPEDANCE

8 Ω

HI PASS FILTER SLOPE

18 dB/Octave

LOW PASS FILTER SLOPE

-

CP-750


100W

1.2 kHz


8 Ω

18 dB/Octave


-

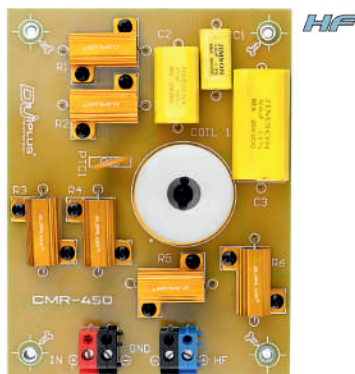

CMR-450

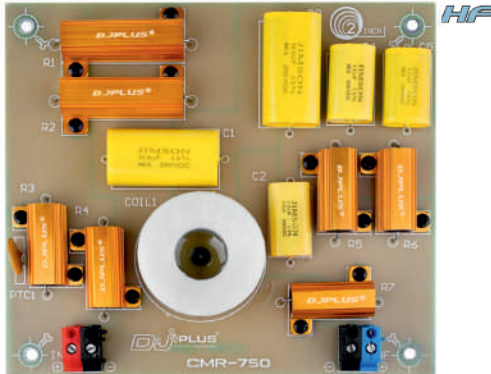

CMR-750

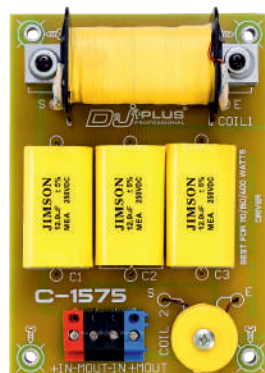

C-1575

SPECIFICATIONS

POWER CAPACITY

CMR-450

50W

CROSSOVER FREQUENCY

2.5 kHz

NOMINAL IMPEDANCE

8 Ω

HI PASS FILTER SLOPE

18 dB/Octave

LOW PASS FILTER SLOPE

-

CMR-750

100W

1.2 kHz

8 Ω

18 dB/Octave

-

SERVO VOLTAGE STABILIZERS



AVAILABLE VARIANTS : 1KVA, 2KVA, 3KVA, 5KVA, 10KVA, 12KVA, 15KVA

PURE COPPER TRANSFORMER

- Specially designed for audio equipment.
- Wide input voltage range for Indian conditions (180-250V).
- High overload capability.
- Short circuit protection.
- Less than 1 sec stabilization time.
- No waveform distortion.
- Low-noise operation.
- Current meter display.
- Accurate voltage control.
- Over and under voltage correction (automatically regulates in both conditions).
- Generator compatible.
- Voltmeter displays output voltage so no more 'drop' during bass thumps.

MICRO CONTROL VOLTAGE STABILIZER



AVAILABLE VARIANTS : 5KVA, 10KVA

HEAVY DUTY TRANSFORMER

- Specially designed for audio equipment.
- Wide input voltage range for Indian conditions (180-250V).
- High overload capability.
- Short circuit protection.
- Less than 1 sec stabilization time.
- Digital Display

SM
Studioman®

Masteramp®

Class H Professional Power Amplifier

HDA

Series

HDA-4400

HDA-4600

HDA-4800



HDA

Series

HDA-3000

HDA-4000



HDA

Series

HDA-5000

HDA-6000

HDA-7000

HDA-8000



HDA Series

HDA-5000

HDA-6000

HDA-7000

HDA-8000

Class H Professional Power Amplifier



Specifications

HDA-8000 | HDA-7000 | HDA-6000 | HDA-5000

Power (Stereo Mode both channel driver)

2 ohms power*	2 X 4400W	2 X 3800W	2 X 3300W	2 X 2600W
4 ohms power*	2 X 3300W	2 X 2800W	2 X 2400W	2 X 2000W
8 ohms power*	2 X 2200W	2 X 1800W	2 X 1500W	2 X 1300W

Power (Bridge Mono Mode)

8 ohms power*	6600W	5600W	4800W	4000W
4 ohms power*	8800W	7600W	6600W	5200W

Frequency Response (8 ohm) 20Hz~20KHz, -0.5dB (+/-0.3dB)

Other specifications

Damping Factor (8 Ohm 1K)	1200:1	1000:1	1000:1	900:1
Slew Rate	>70v/us	>60v/us	>50v/us	>50v/us
Input Sensitivity	0.775V/1.0V/1.4V			
Output topology	Class H			
Cooling	4 FAN COOLING			
Power Supply	220-240v/45-55Hz			

Weight (Kg)


Weight (Gross)	48Kg	42Kg	40Kg	36Kg
----------------	------	------	------	------

HDA

Series

HDA-3000

HDA-4000

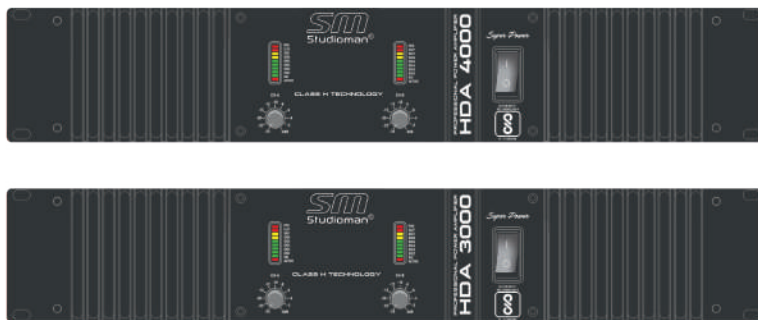

Class H Professional Power Amplifier

Specifications

HDA-4000 | HDA-3000

Power (Stereo Mode both channel driver)		
2 ohms power*	2 X 2000W	2 X 1500W
4 ohms power*	2 X 1200W	2 X 900W
8 ohms power*	2 X 800W	2 X 600W
Power (Bridge Mono Mode)		
8 ohms power*	—	—
4 ohms power*	—	—
Frequency Response (8 ohm)	20Hz~20KHz, -0.5dB (+/-0.5dB)	
Other specifications		
Damping Factor (8 Ohm 1K)	>500	>500
Slew Rate	>90v/us	>90v/us
Output topology	Class H	Class H
Cooling	FAN COOLING	
Power Supply	220-240v/45-55Hz	
Weight (Kg)		
Weight (Gross)	27Kg	25.5Kg

HDA

Series
HDA-4800



Class H Professional Power Amplifier

Specifications

HDA-4400 | HDA-4600 | HDA 4800

Power (Stereo Mode both channel driver)

4 ohms power*	4 X 600W	4 X 900W	4 X 1200W
8 ohms power*	4 X 400W	4 X 600W	4 X 800W

Power (Bridge Mono Mode)

8 ohms power*	2 X 1200W	2 X 1800W	2 X 2400W
4 ohms power*	—	—	—
Frequency Response (8 ohm)	20Hz~20KHz	20Hz~20KHz	20Hz~20KHz

Other specifications

S/N Ratio	>110dB	>110dB	>110dB
THD+N (8 ohm 1kHz in 1/4 Output)	<0.01%	<0.01%	<0.01%
Damping Factor (8 Ohm 1K)	>500	>500	>500
Slew Rate	20v/us	20v/us	20v/us
Input Sensitivity	0.775V/1.0V/1.4V	0.775V/1.0V/1.4V	0.775V/1.0V/1.4V
Output topology	Class H	Class H	Class H
Cooling	4 FAN COOLING	4 FAN COOLING	4 FAN COOLING

Weight (Kg)

Weight (Gross)	28Kg	29Kg	31Kg
----------------	------	------	------

SMM
Studioman®

MASTERAMP CLASS D AMPLIFIER



D10K2

2 CHANNEL MODE		
8Ω	4Ω	2Ω
2*3100W	2*5200W	2*7200W



D12K2

2 CHANNEL MODE		
8Ω	4Ω	2Ω
2*3700W	2*6700W	2*7700W



D14K2

2 CHANNEL MODE		
8Ω	4Ω	2Ω
2*4400W	2*7900W	2*8600W



D6K4

4 CHANNEL MODE		
8Ω	4Ω	2Ω
4*700W	4*1200W	4*1900W

ACCESSORIES

1.5 / 2 / 2.5 mm



SPEAKER CABLE



MICROPHONE CABLE



LINE MATCHING TRANSFORMER - LMT-30



POWER SUPPLY FOR DD3 - PSA



SPEAKON PLUG - SPK - Z - 007P



XLR FEMALE PLUG - XLR - N - 003F



XLR MALE PLUG - XLR - N - 004M



MICROPHONE CARTRIDGE



MICROPHONE - WIND SCREEN
SPONGE 6 COLOUR



MICROPHONE HOLDER



SOUND BOX BELT - 10 & 15 METER



SPEAKER PARTS OF DJPLUS SPEAKERS



Masteramp[®]
SM
 Studioman[®]
DJ+PLUS[®]
 PROFESSIONAL

Authorised Dealer:



Design & Specifications are subject to change without notice owing to continuous product up-gradation.
 Technical Specifications are subject to production tolerances.
 We cannot held responsible for printing errors, should they occur.

www.djplusindia.com